

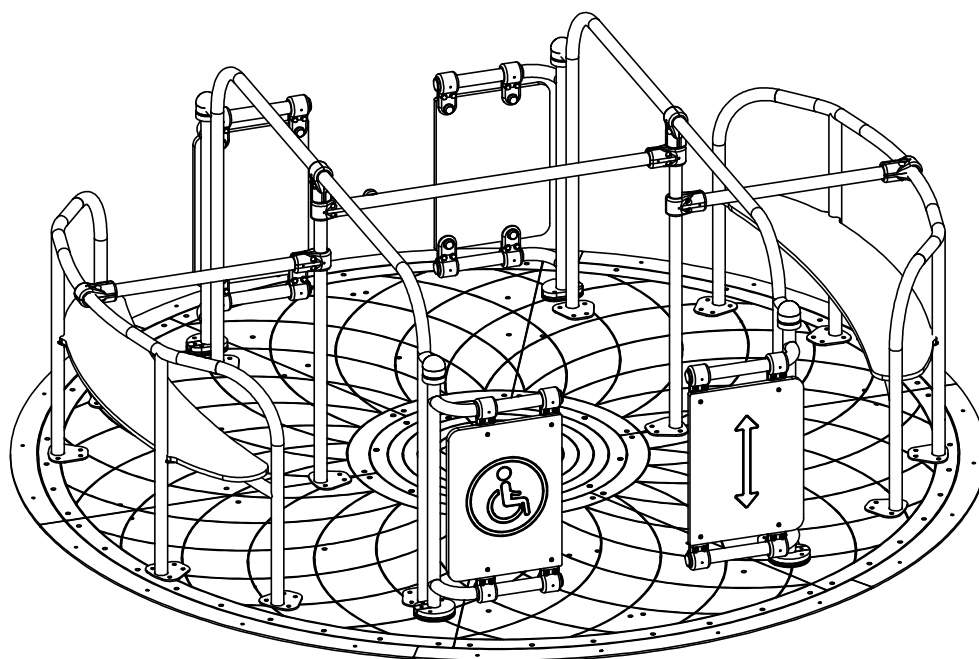
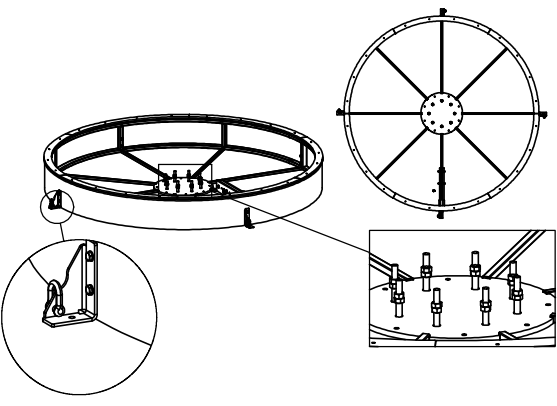
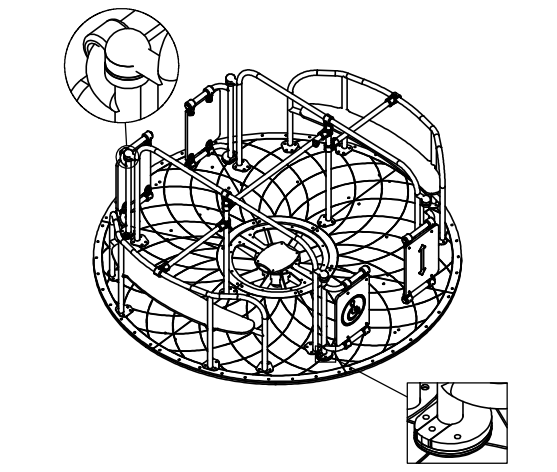
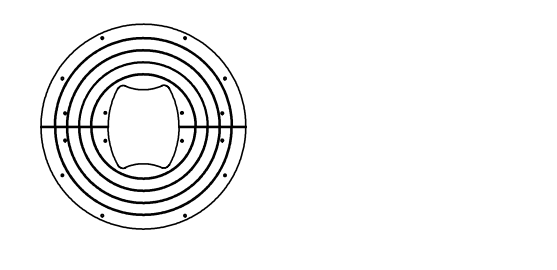
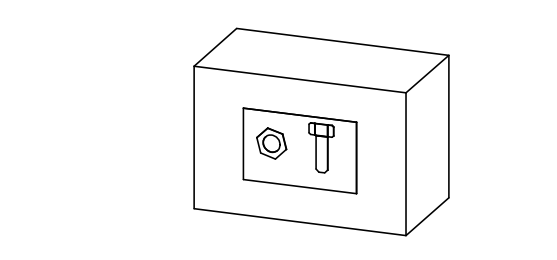


4078










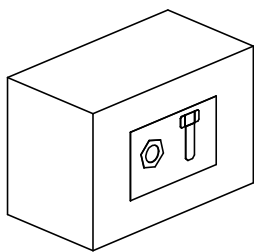


4078N





| NR | ELEMENT | 4078N |
|----|-------------------------------------------------------------------------------------|-------|
| E1 |  | 1 |
| E2 |  | 1 |
| E3 |  | 1 |
| E4 |  | 1 |
| | | |





4078N

| Nr | Element | DIN | ELEMENT | Σ |
|-----|-------------------------------------------------------------------------------------|----------|------------|----|
| 4 |  | DIN 125 | 10x20 (OC) | 8 |
| 61 |  | - | KL105 (OC) | 4 |
| 82 |  | DIN 934 | M10 (OC) | 8 |
| 89 |  | DIN 934 | M16 (OC) | 16 |
| 90 |  | DIN 125 | 16x30 | 8 |
| 132 |  | DIN 7991 | M6x25 | 16 |
| 213 |  | - | Z_NA_1 | 1 |
| 214 |  | - | Z_NA_2 | 1 |
| 526 |  | - | KCH | 1 |
| 561 |  | - | S1_4000_60 | 8 |

4078N

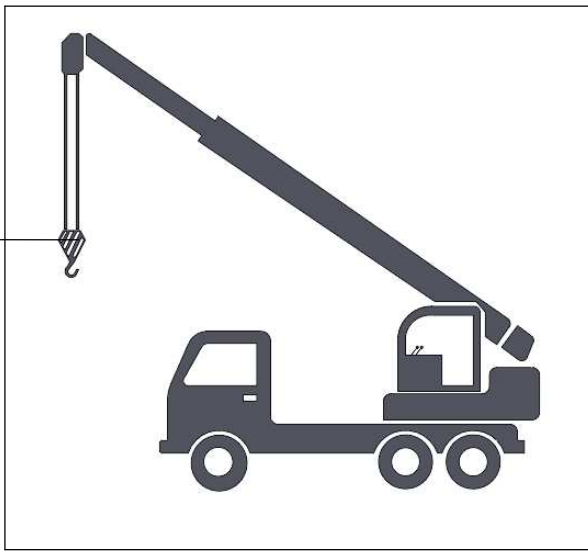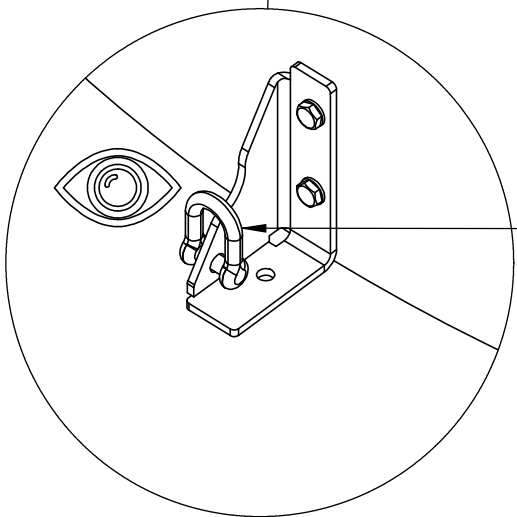
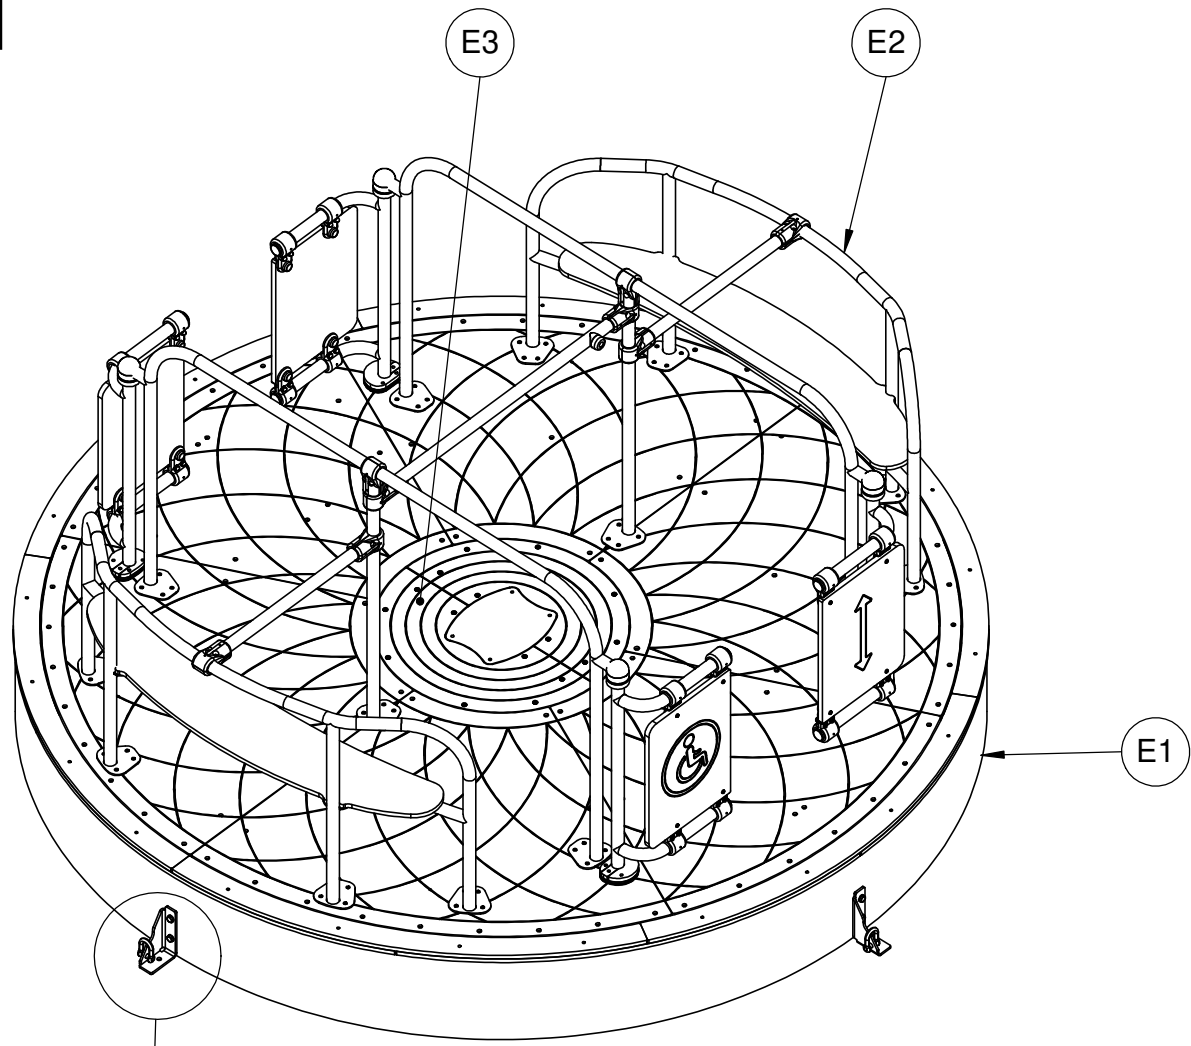


4078N

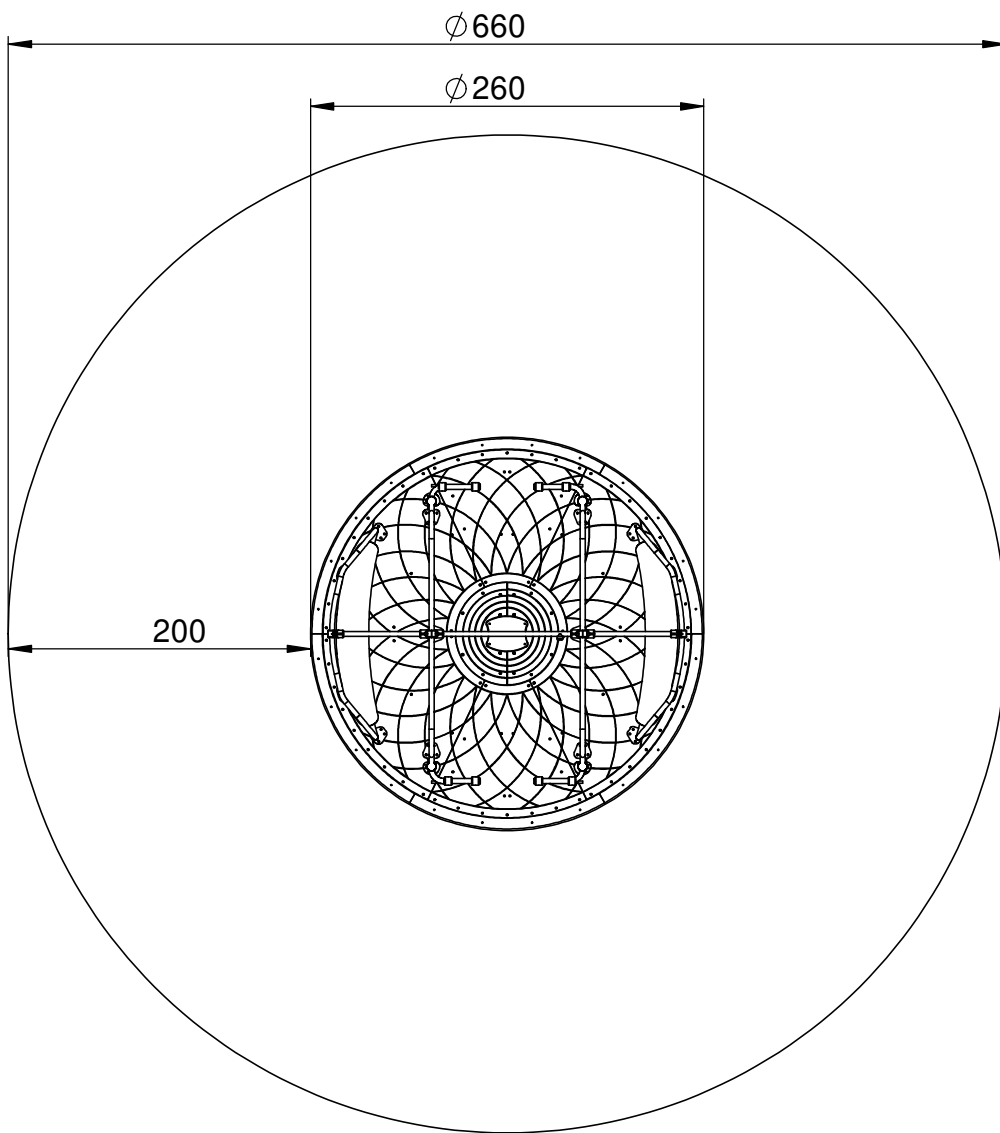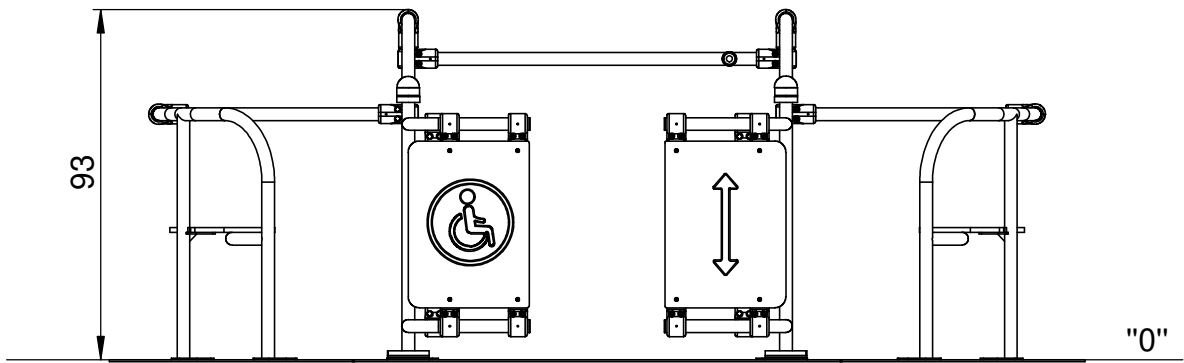



1

4078N

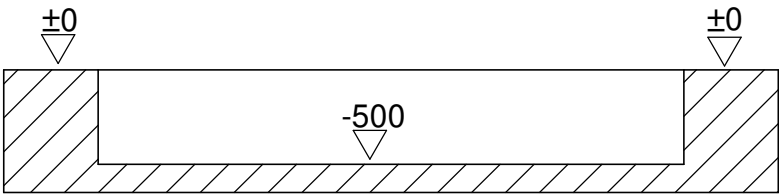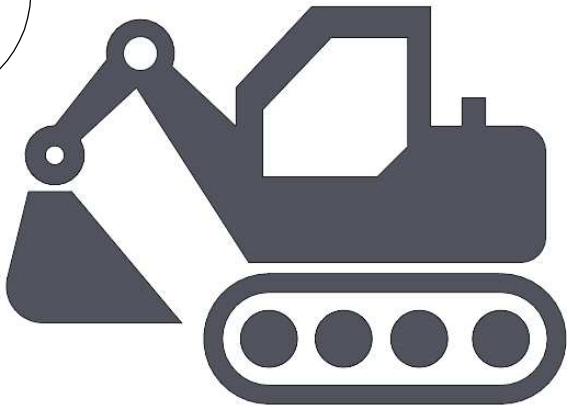


A-A (1 : 40)

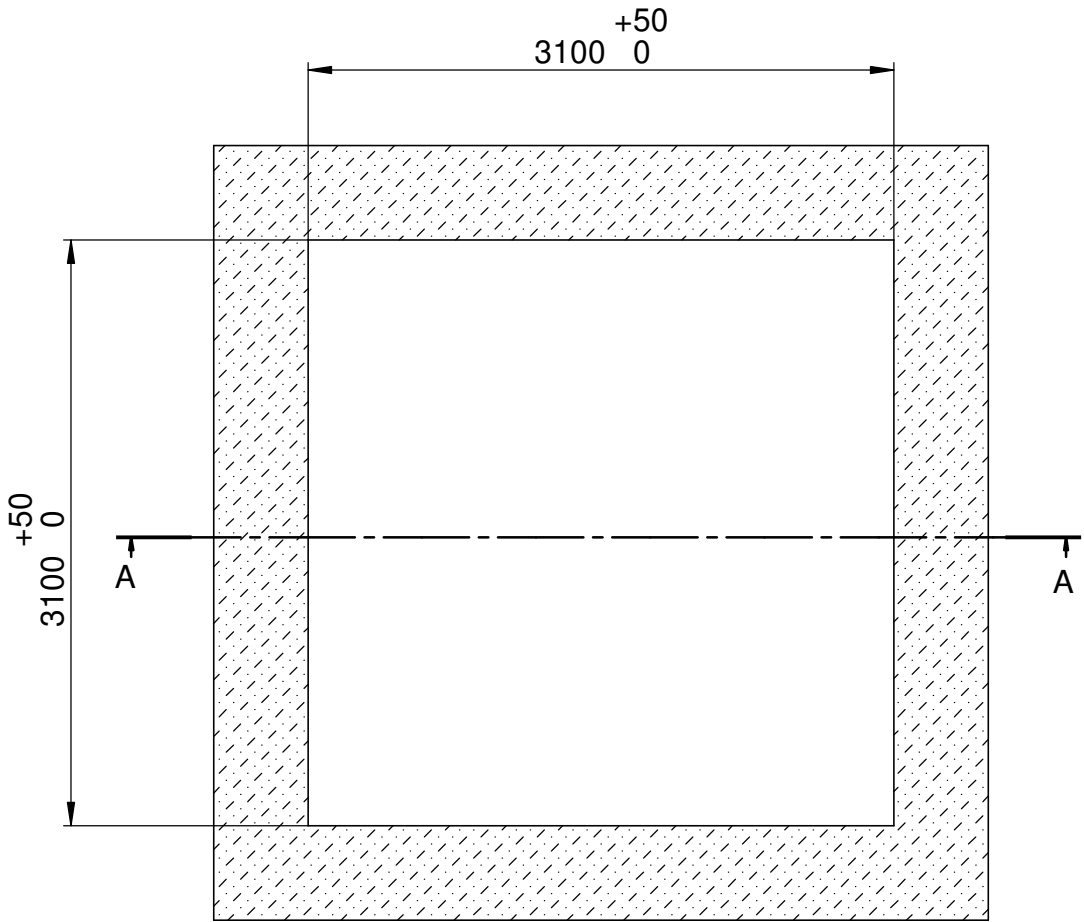

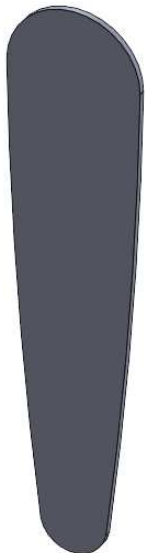

"0"

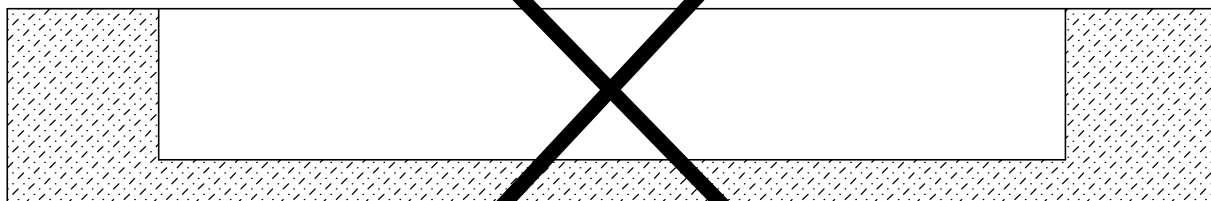

"0"

2


4078N




GUIDELINES FOR PREPARING THE FOUNDATION FOR THE CAROUSELS:

1. The foundation plate should be smoothly finished, without cracks.
2. The foundation should be secured and left for 48 hours.
3. For verification purposes, the dimension sheet attached to the documentation must be completed, signed, sealed and sent back to BUGLO's headquarters.

Positive verification will be the basis for warranty.






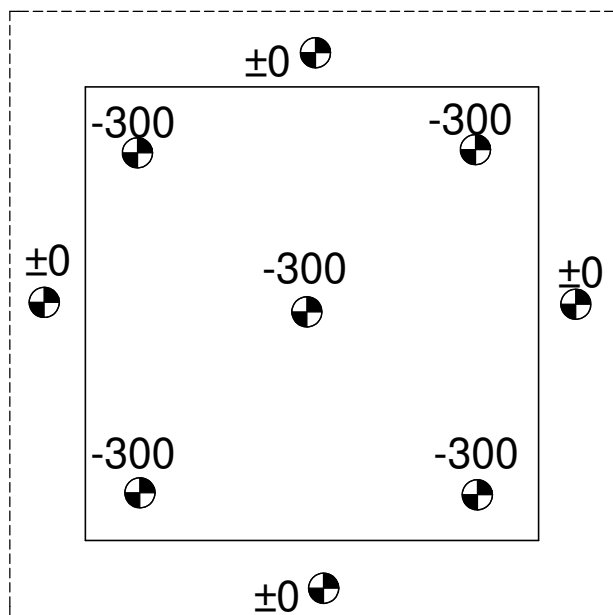




Tolerance for dimension -300: +3 mm / -3 mm
Max. level difference: 3 mm

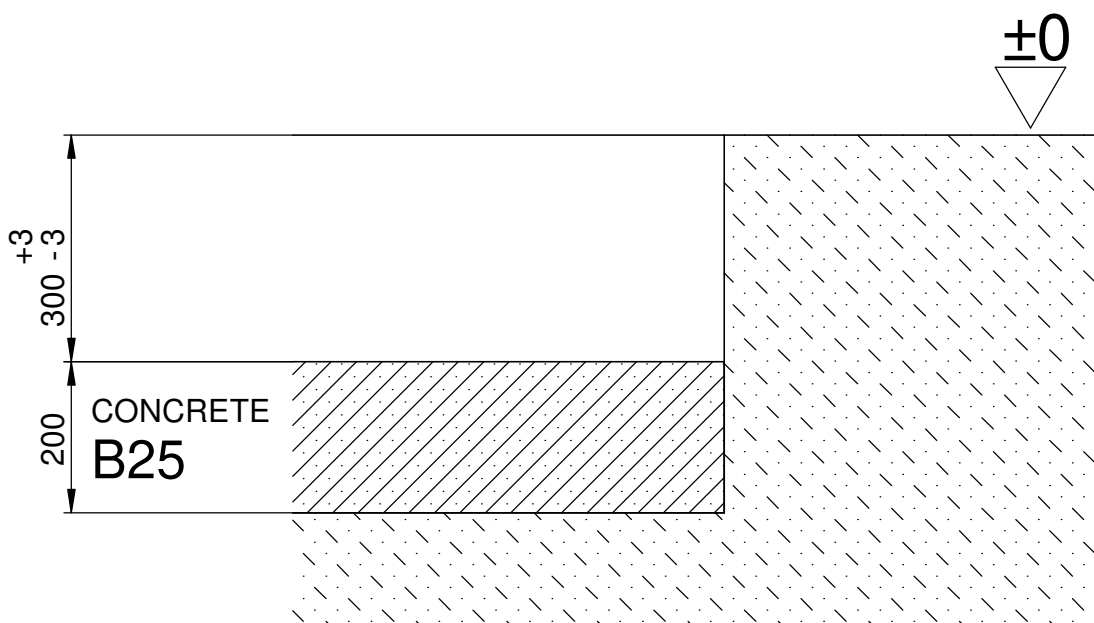

3


4078N

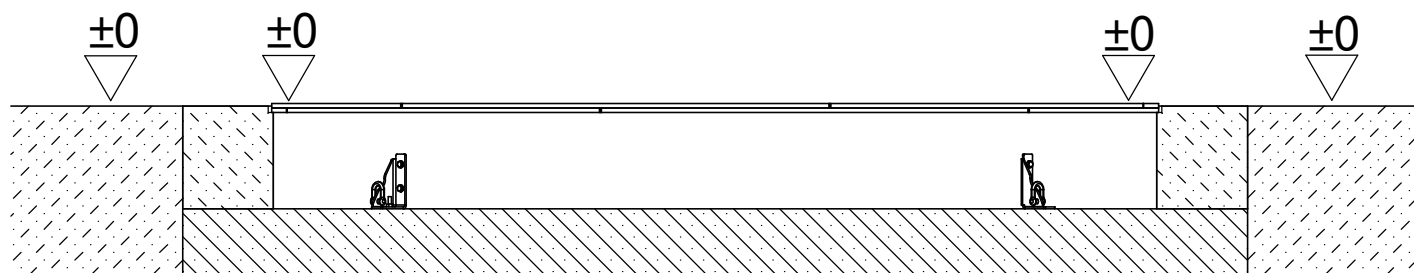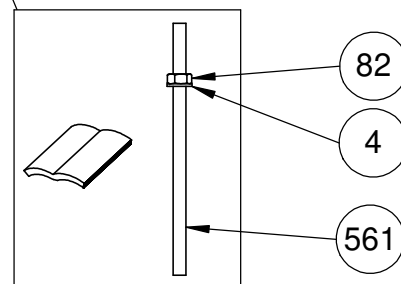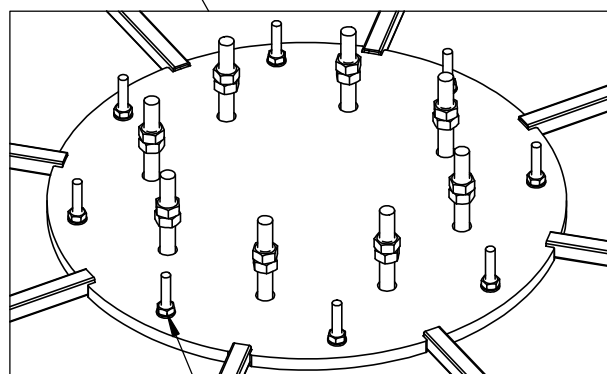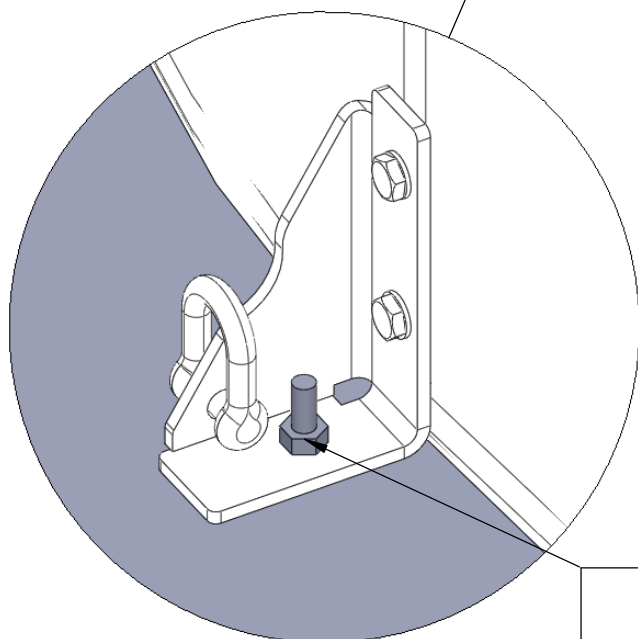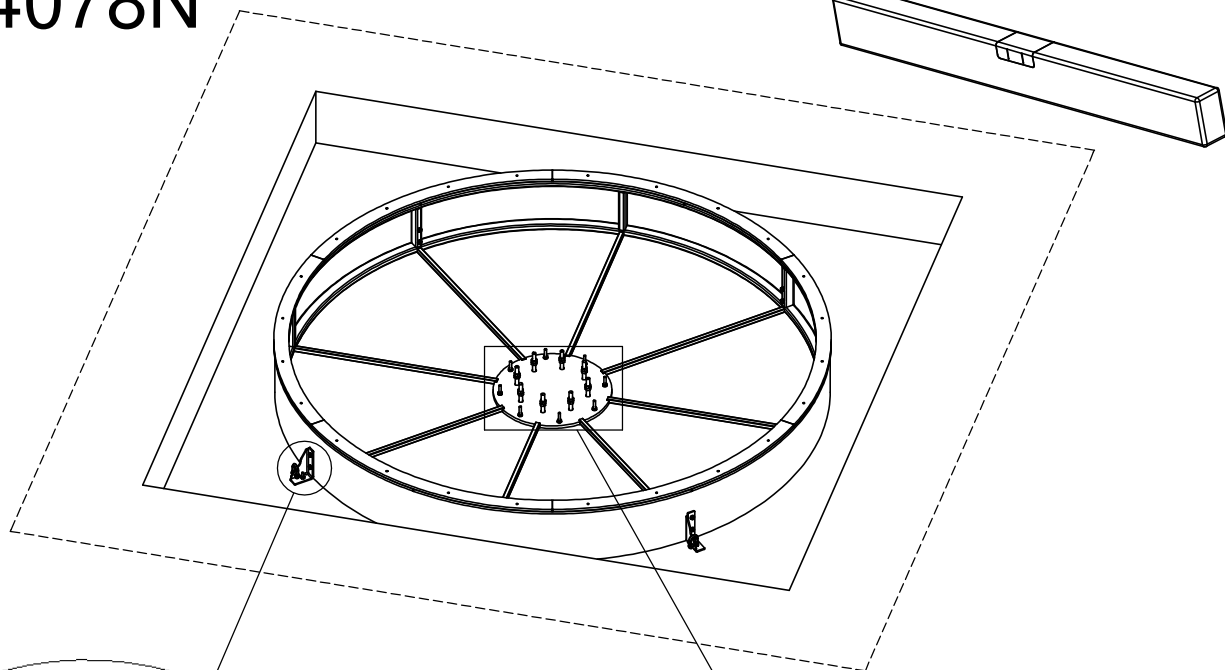

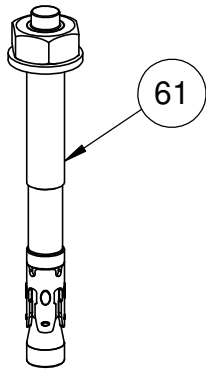


| Nr | Element | | |
|----|---------|---|-------|
| 61 | | - | KL105 |


I

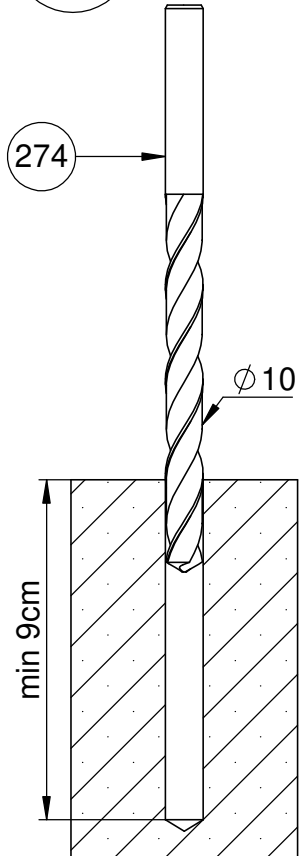


II

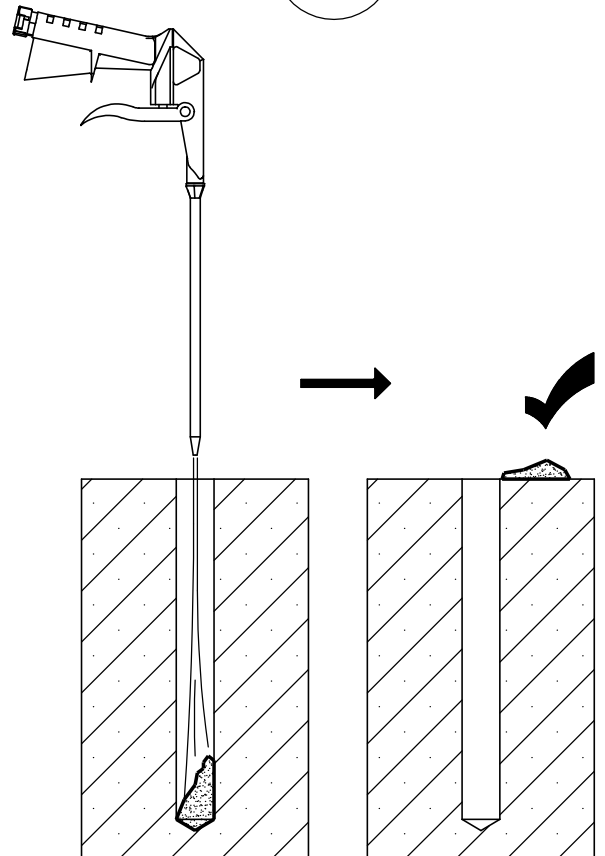


III

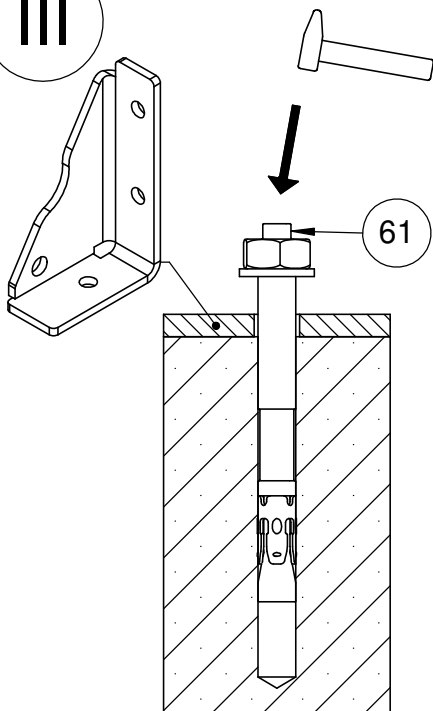


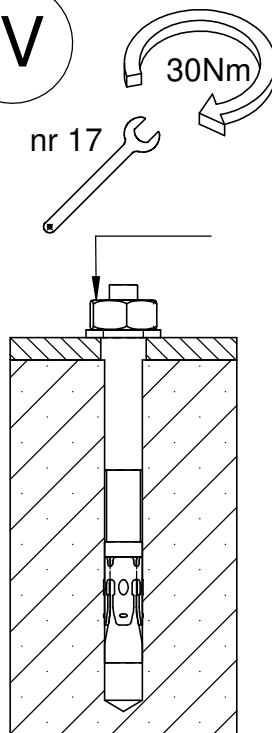



IV







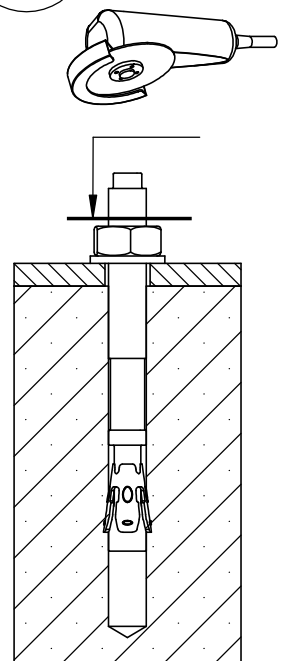


V

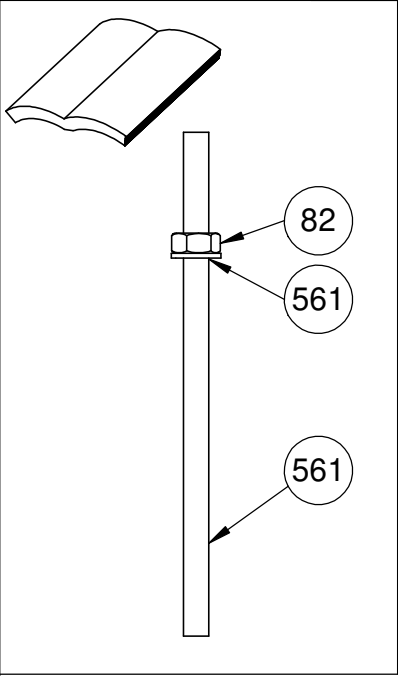





| Nr | Element | | |
|-----|-------------------------------------------------------------------------------------|---------|------------|
| 4 |  | DIN 125 | 10x20 (OC) |
| 82 |  | DIN 934 | M10 (OC) |
| 526 |  | - | KCH |
| 561 |  | - | S1_4000_60 |

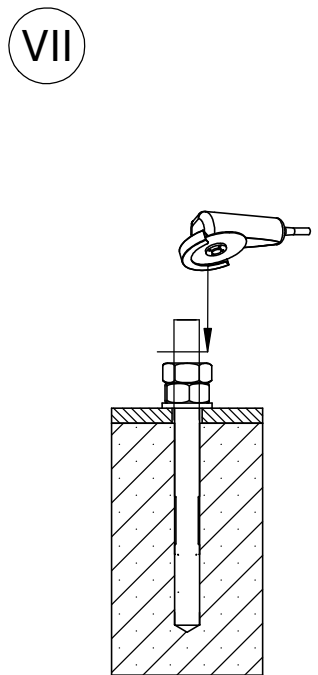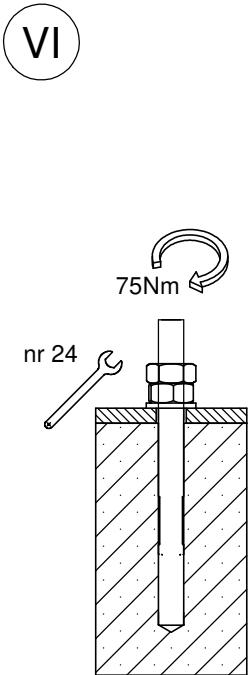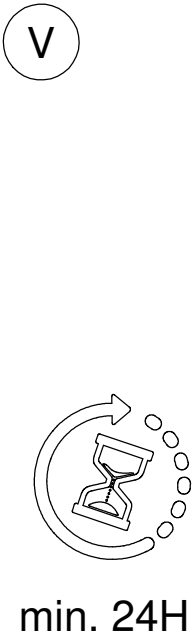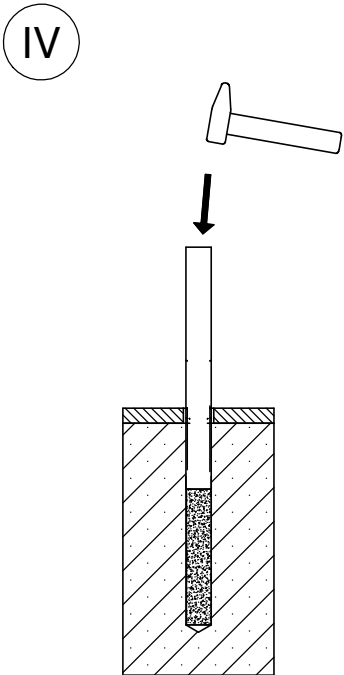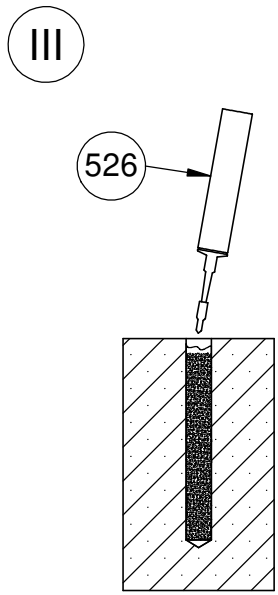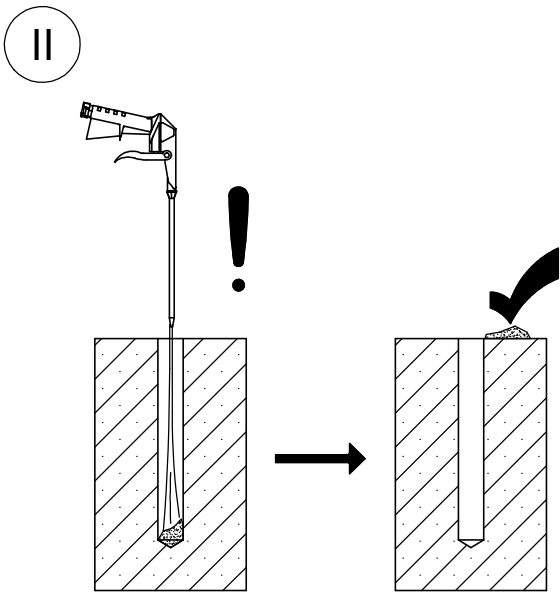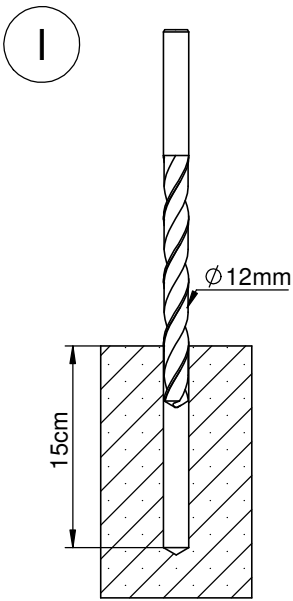




4

4078N

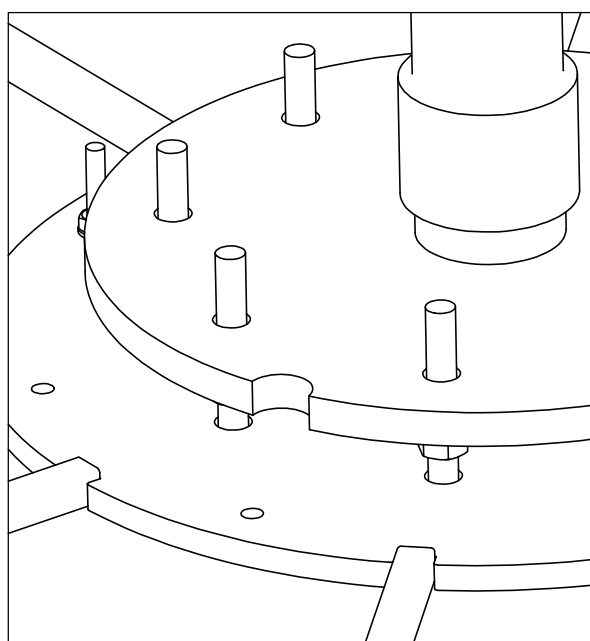
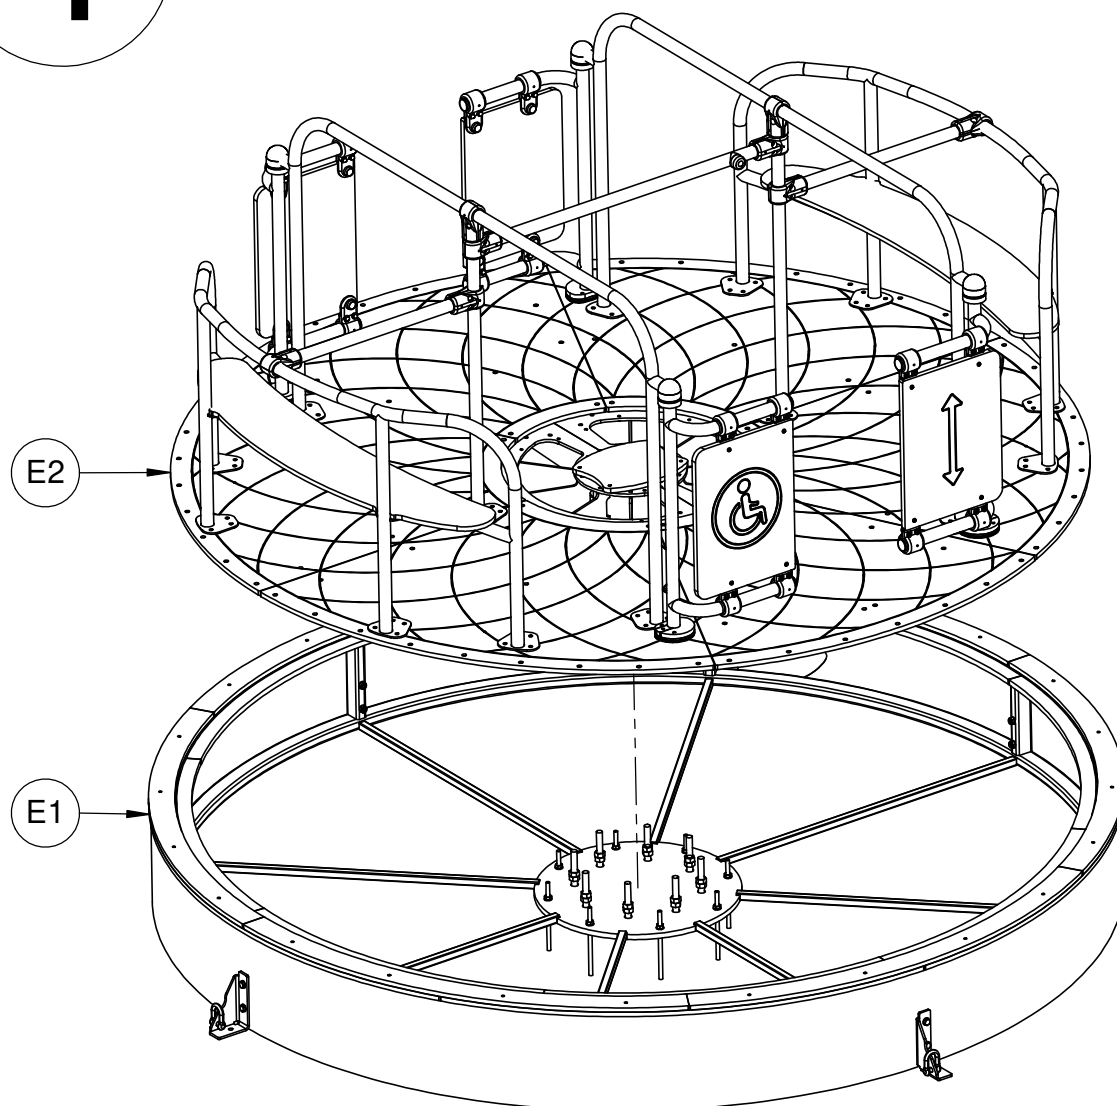


5

4078N

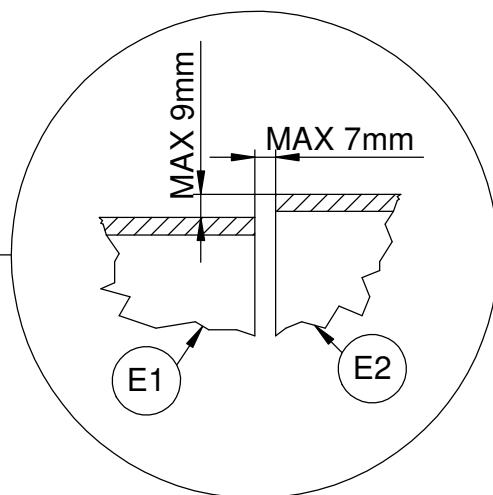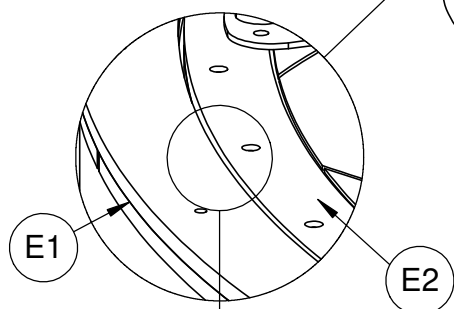
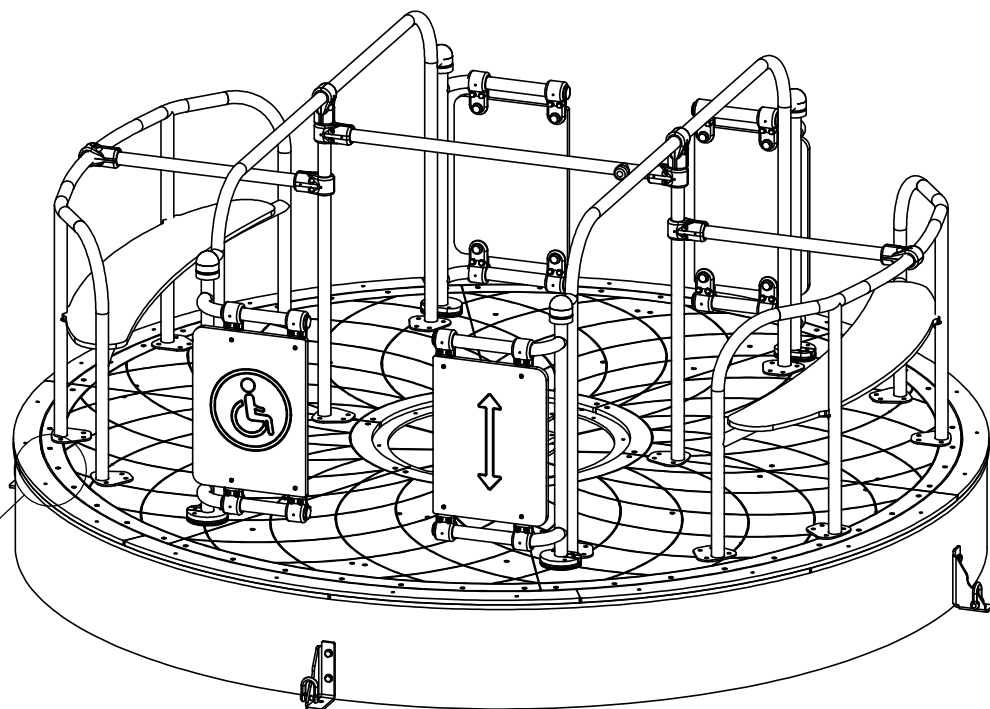


6

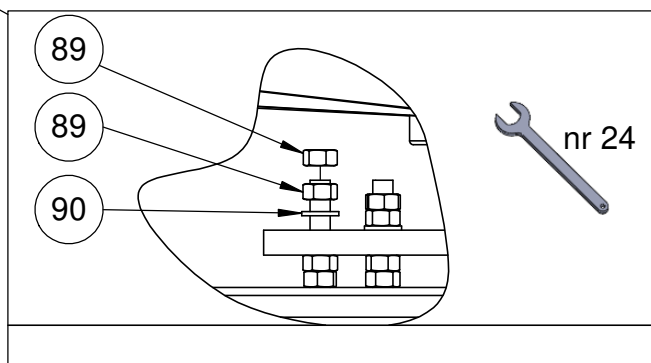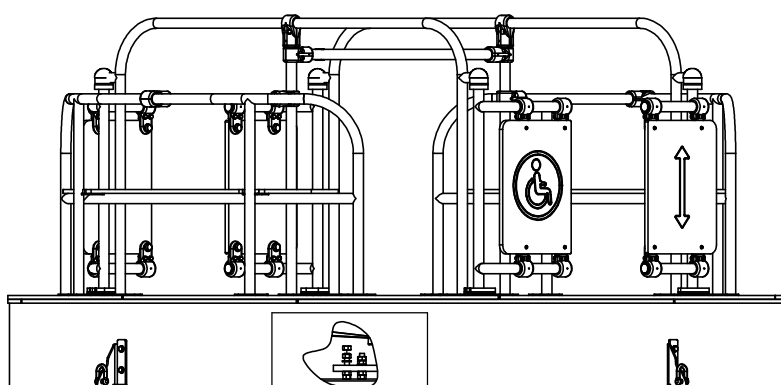


7

4078N

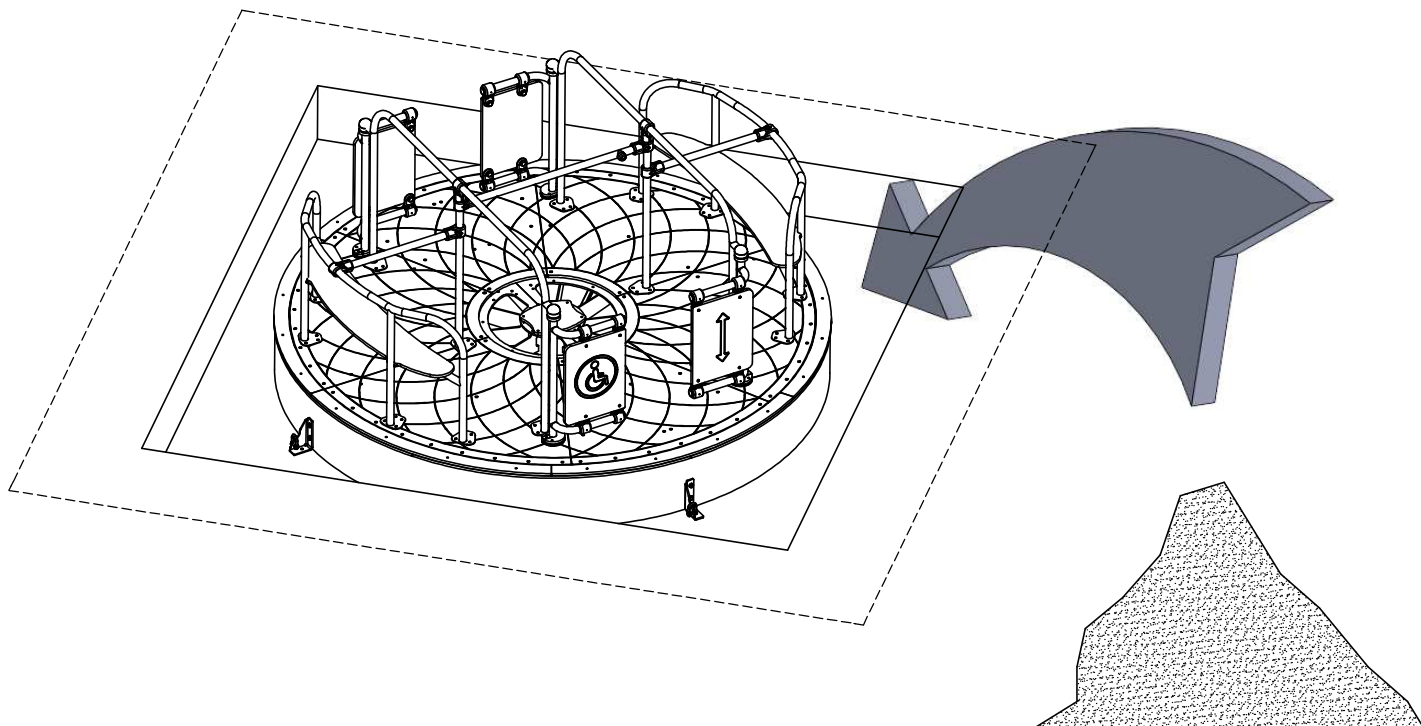


INST Z 1

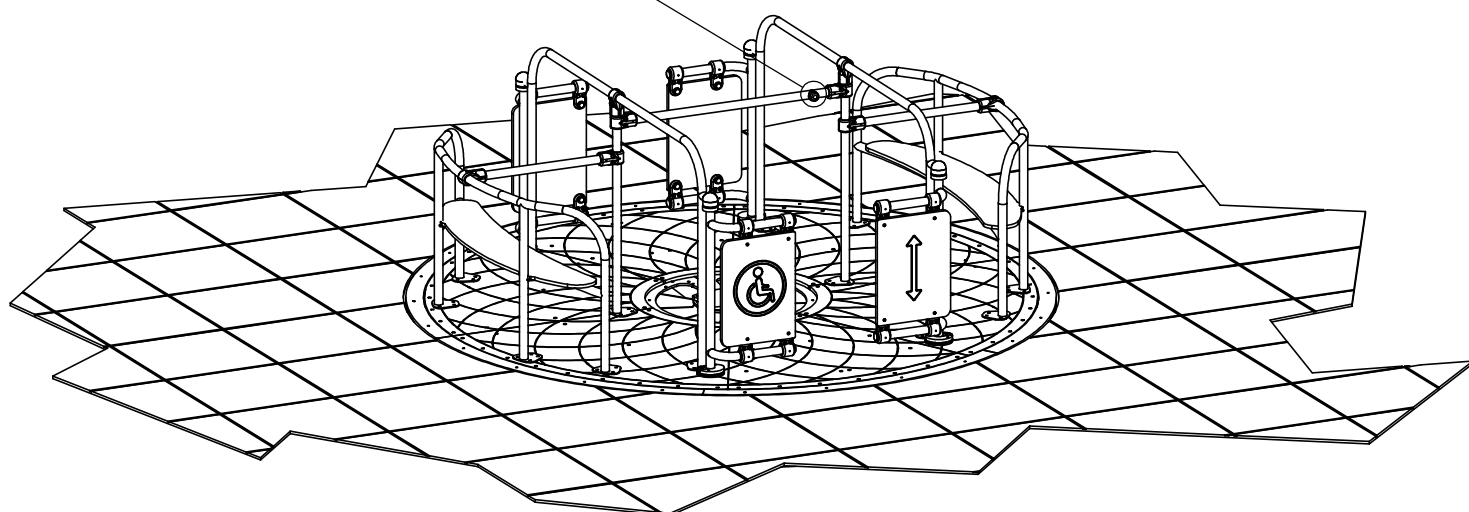

8

4078N

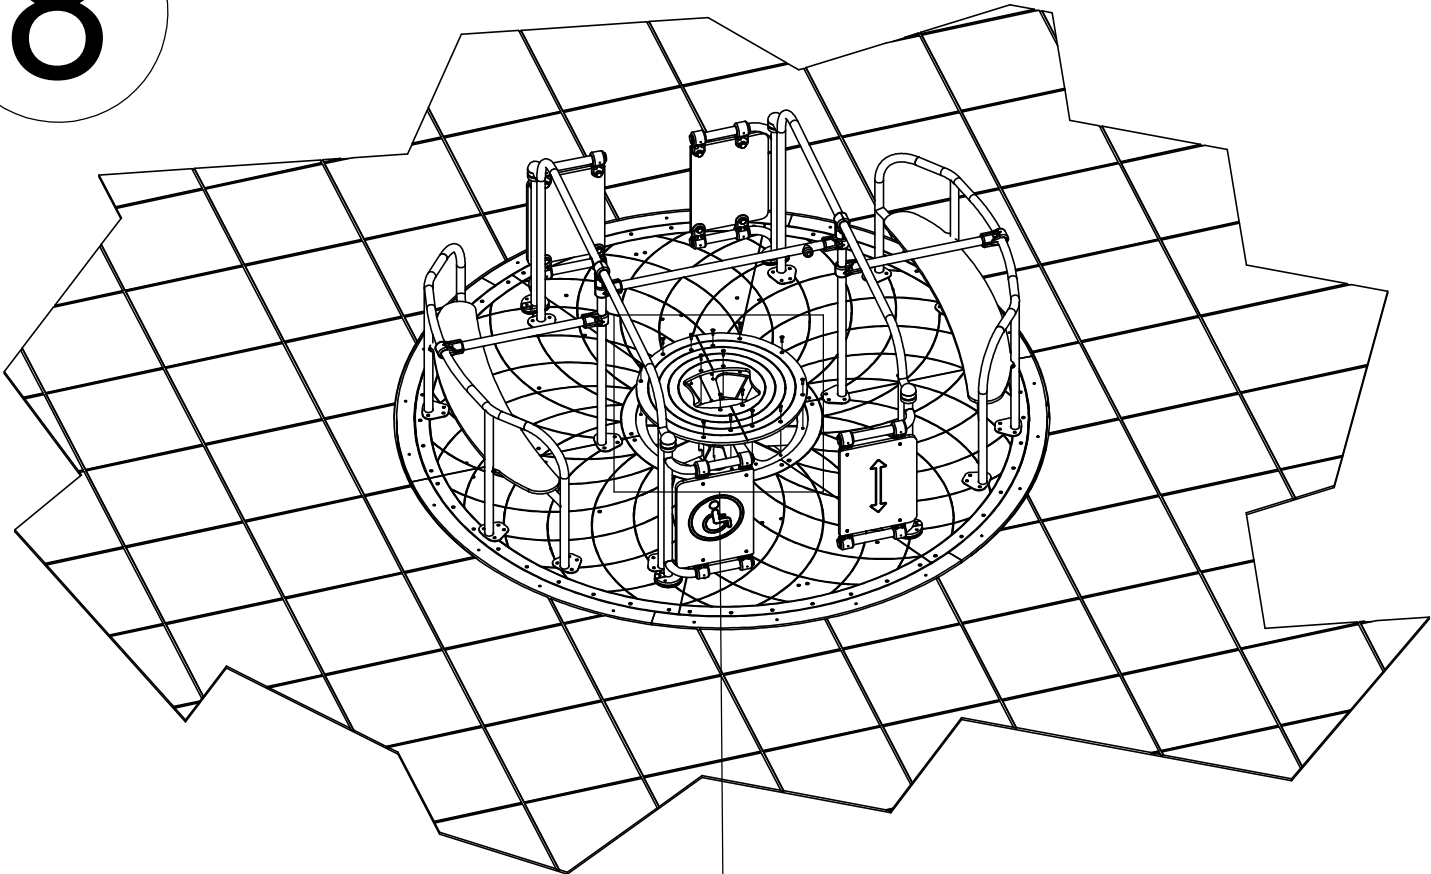

132

E3

