

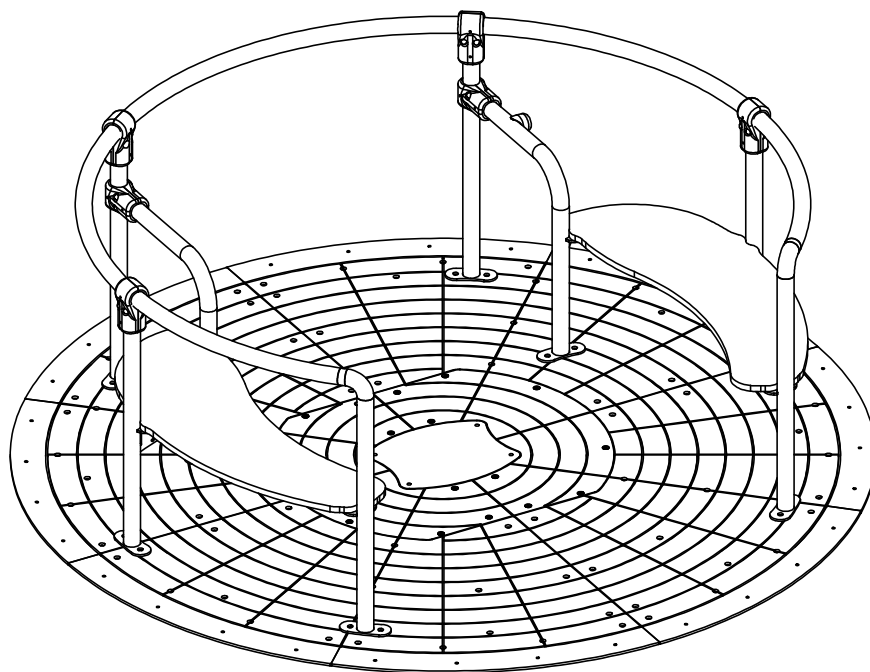
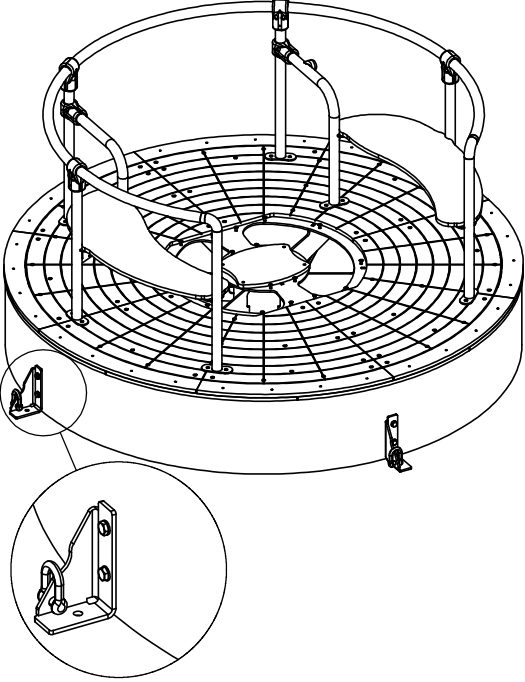
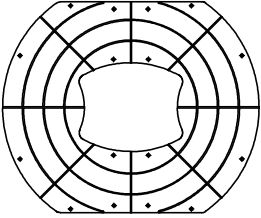

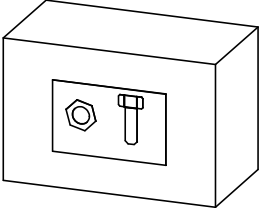


4079








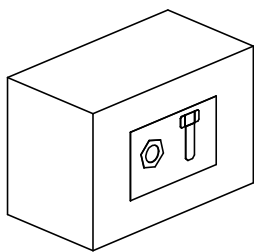


4079N




NR	ELEMENT	4079N
E1		1
E2		1
E3		1
E4		1





4079N

Nr	Element	DIN	ELEMENT	Σ
4		DIN 125	10x20 (OC)	8
61		-	KL105 (OC)	4
82		DIN 934	M10 (OC)	8
132		DIN 7991	M6x25	16
213		-	Z_NA_1	1
214		-	Z_NA_2	1
526		-	KCH	1
561		-	S1_4000_60	10

4079N

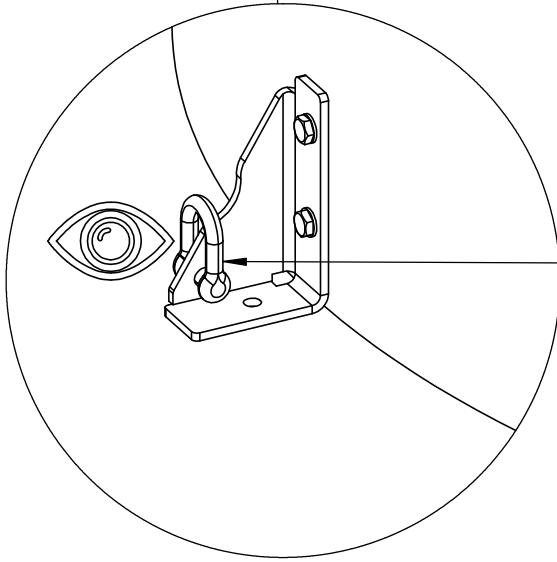
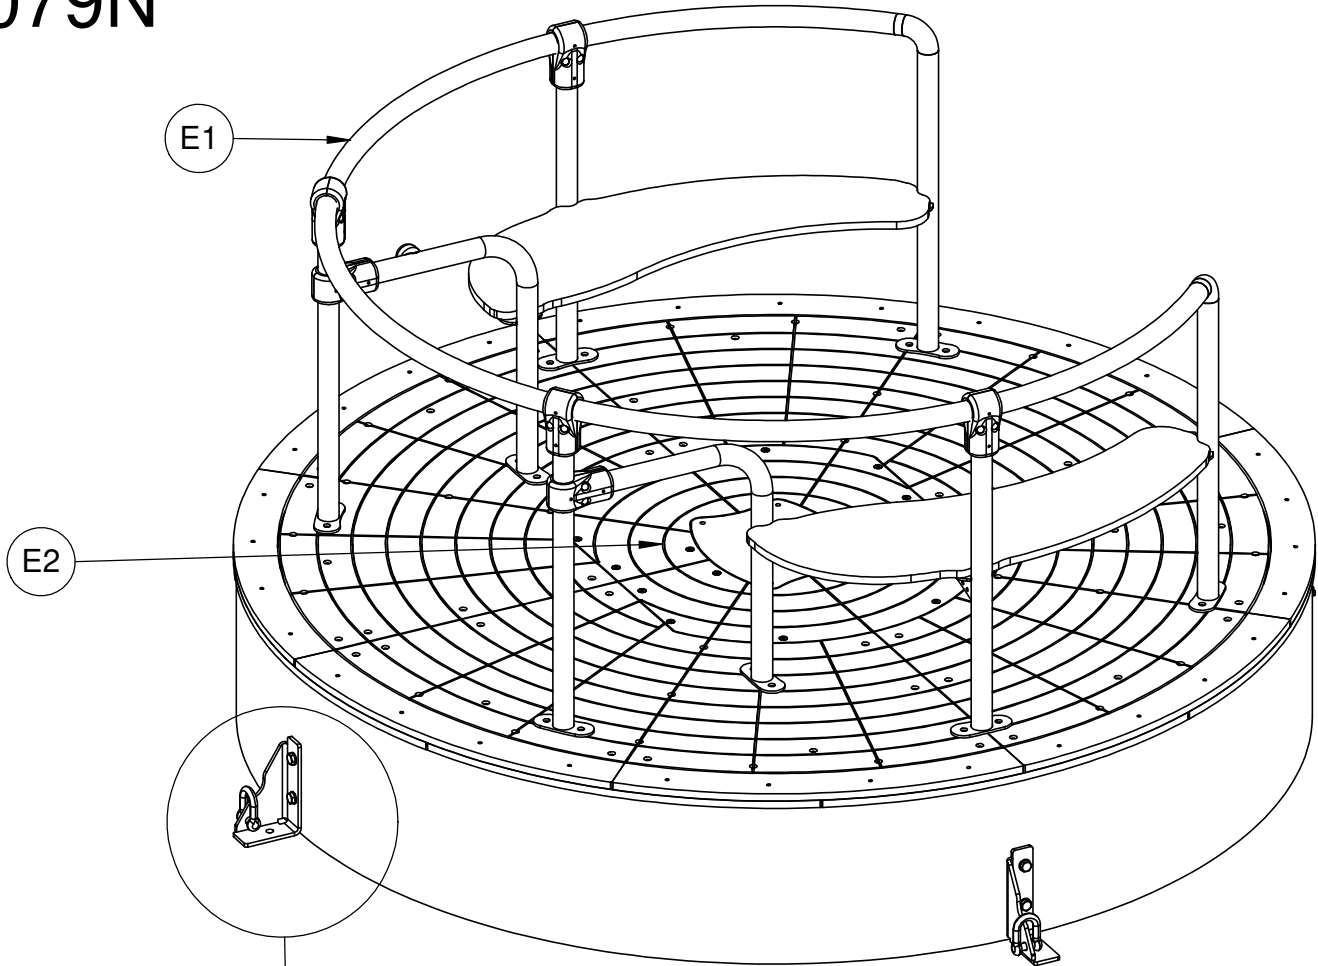


4079N

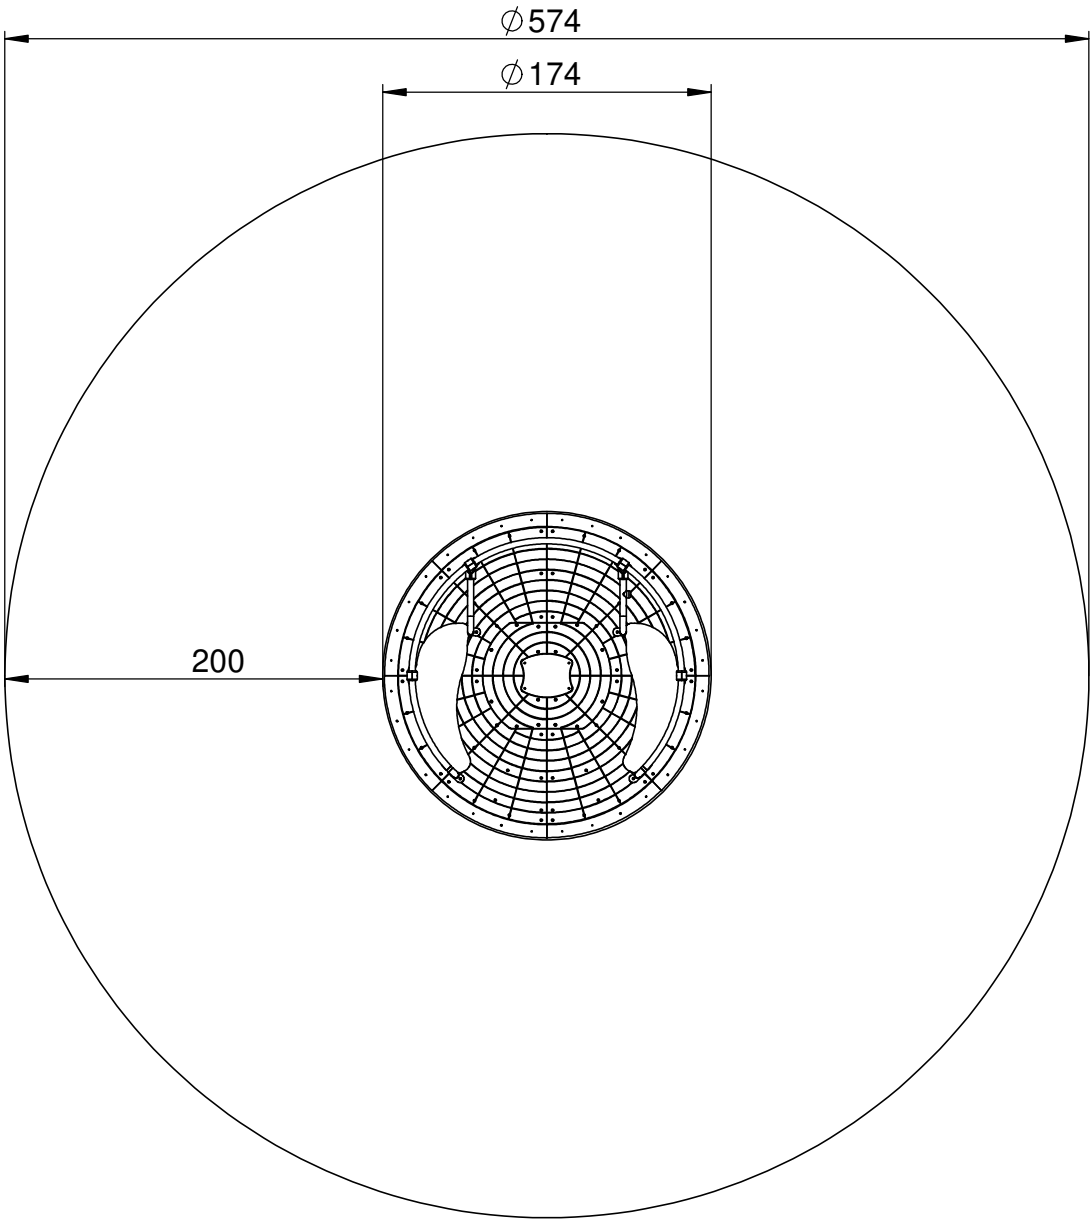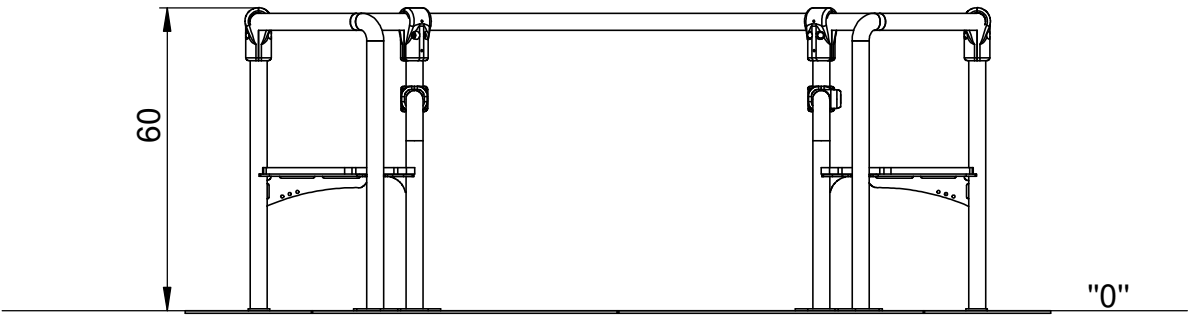



1

4079N

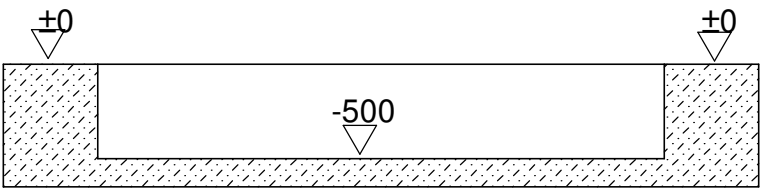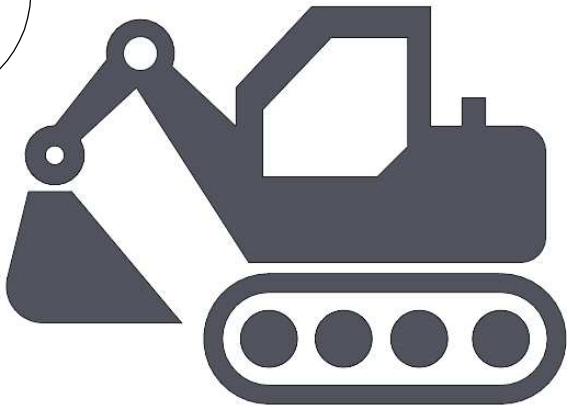

A-A (1 : 40)

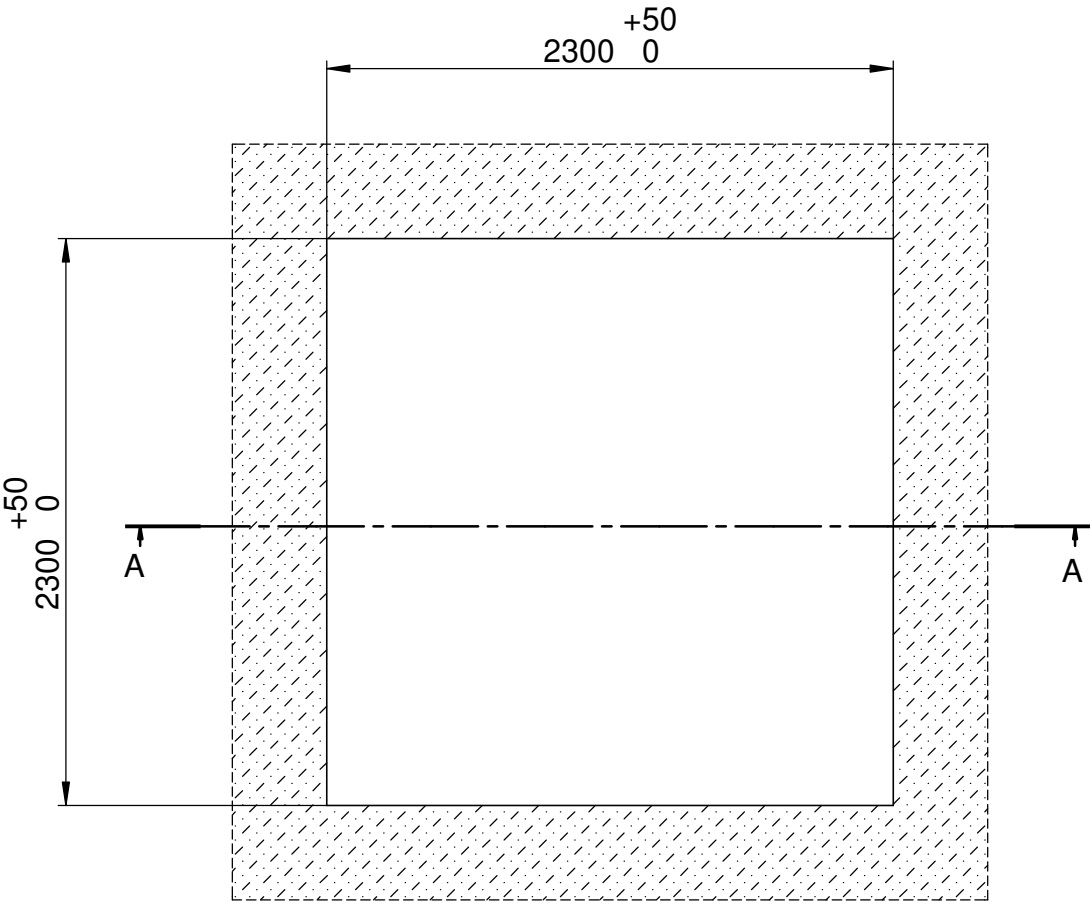

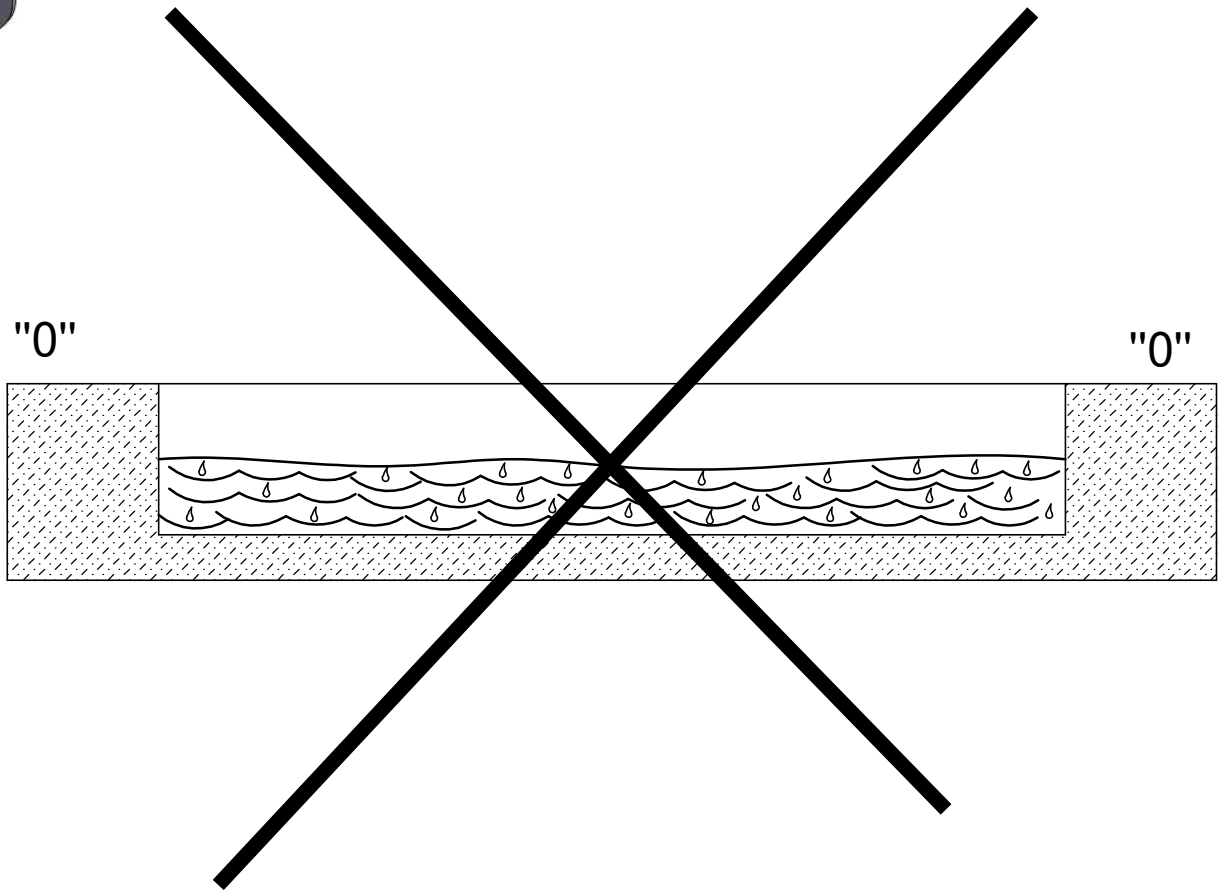

2


4079N




GUIDELINES FOR PREPARING THE FOUNDATION FOR THE CAROUSELS:

1. The foundation plate should be smoothly finished, without cracks.
2. The foundation should be secured and left for 48 hours.
3. For verification purposes, the dimension sheet attached to the documentation must be completed, signed, sealed and sent back to BUGLO's headquarters.

Positive verification will be the basis for warranty.

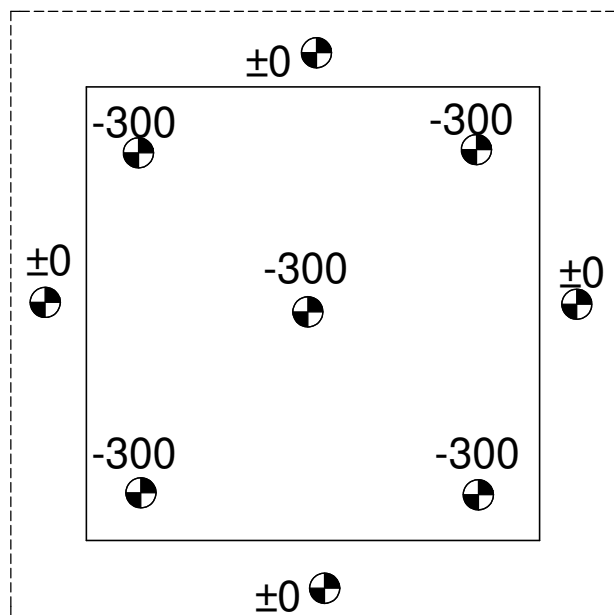



Tolerance for dimension -300: +3 mm / -3 mm
Max. level difference: 3 mm

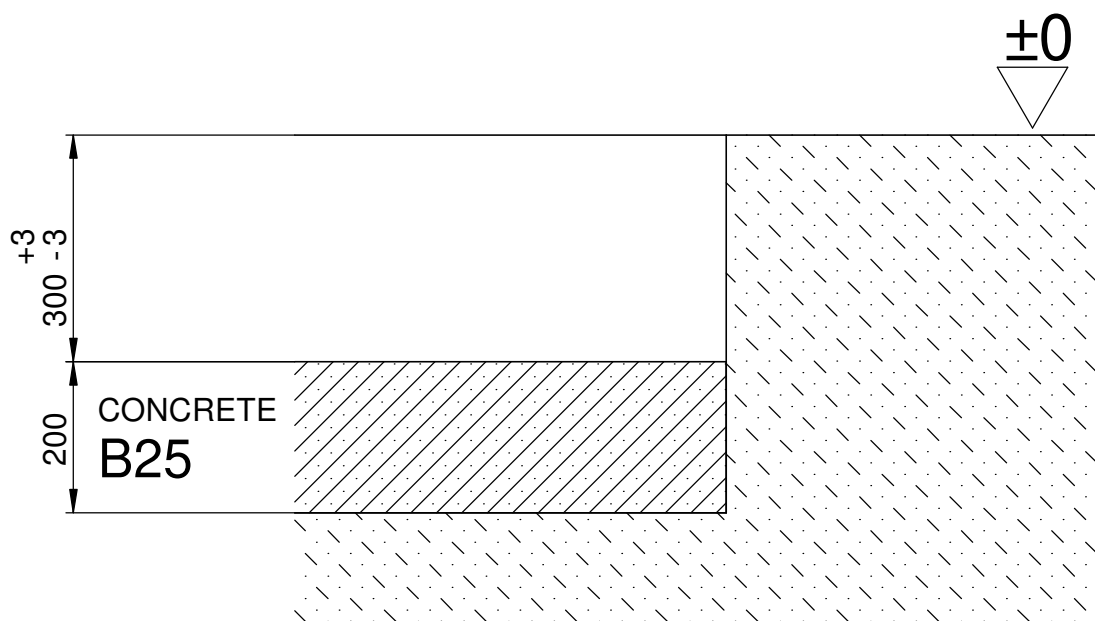


[Dimensions in mm]

3


4079N

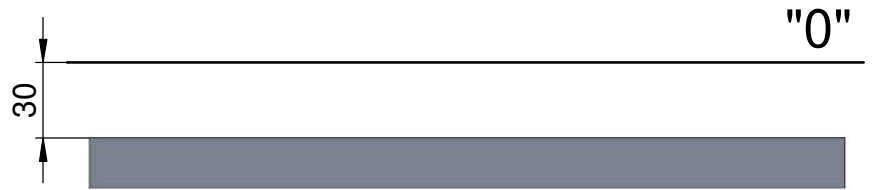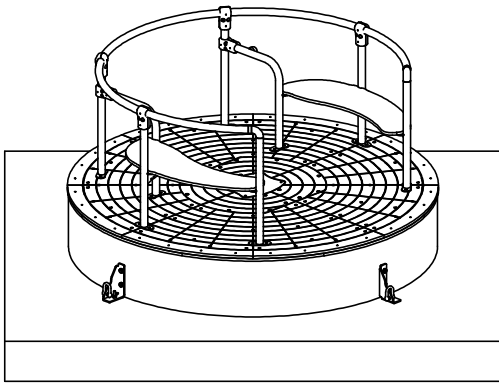

I

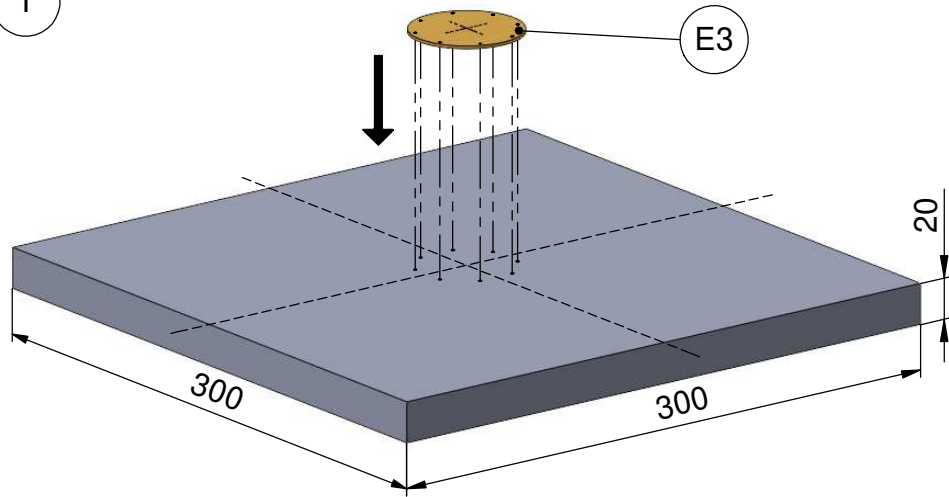


II

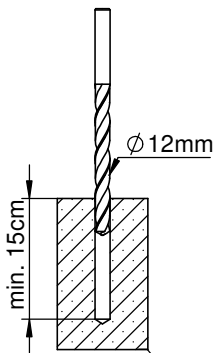


III


E3

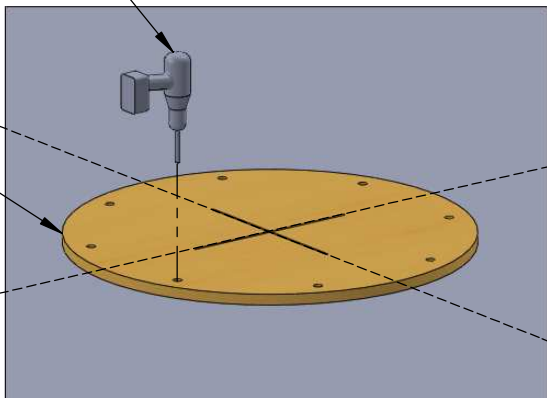

8x $\phi 12$

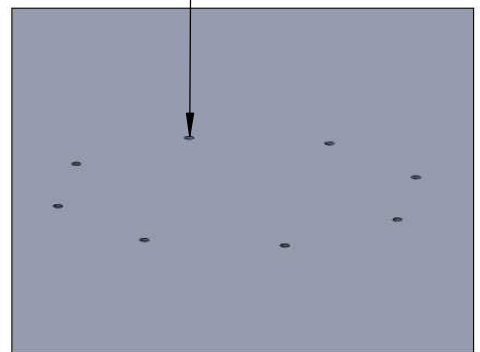


IV

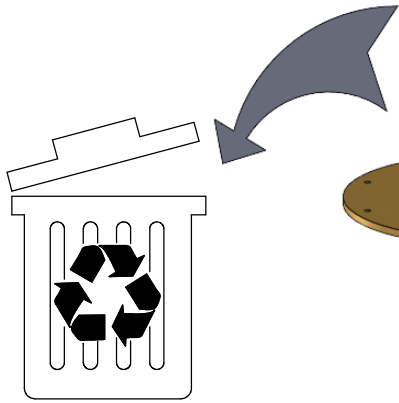


E3


V












561


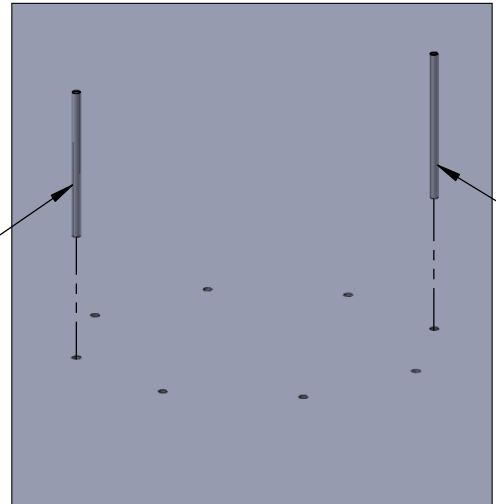


561

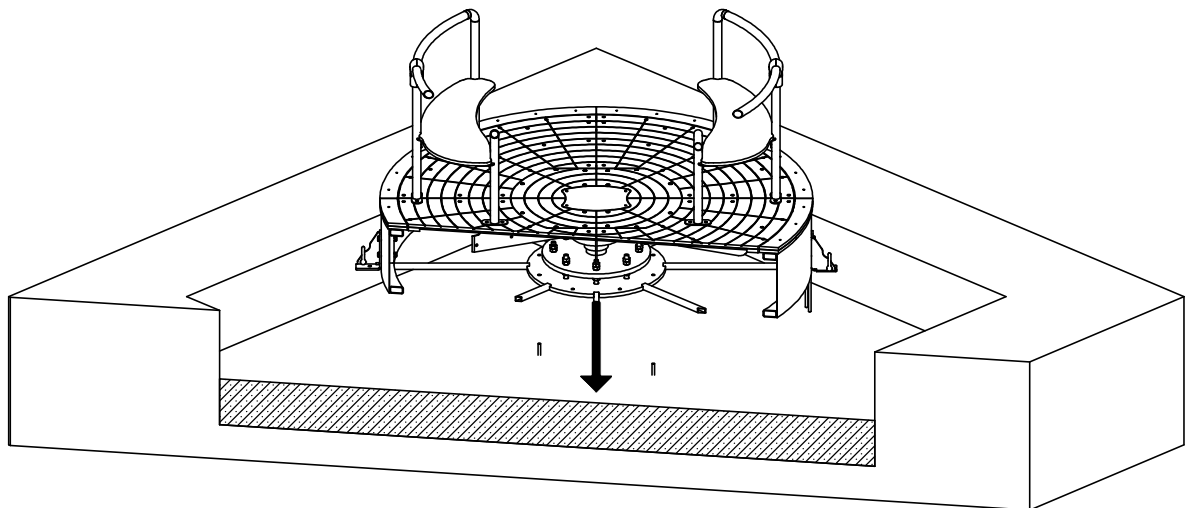

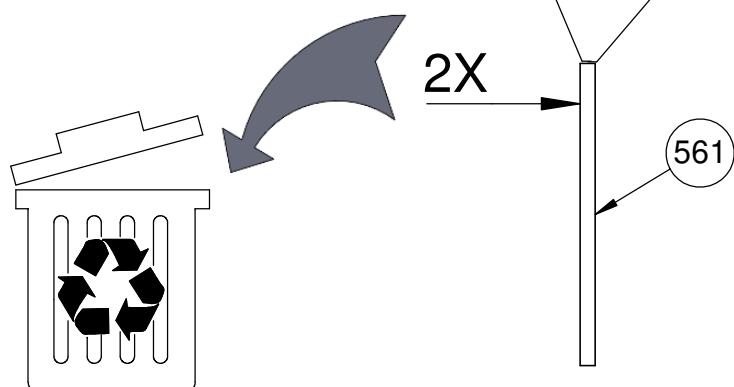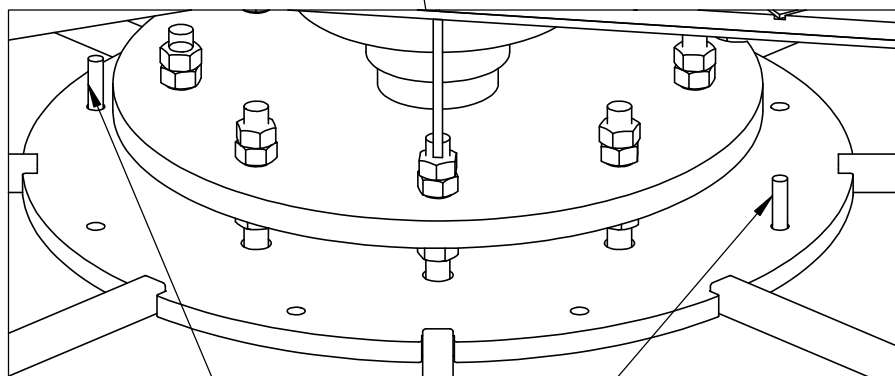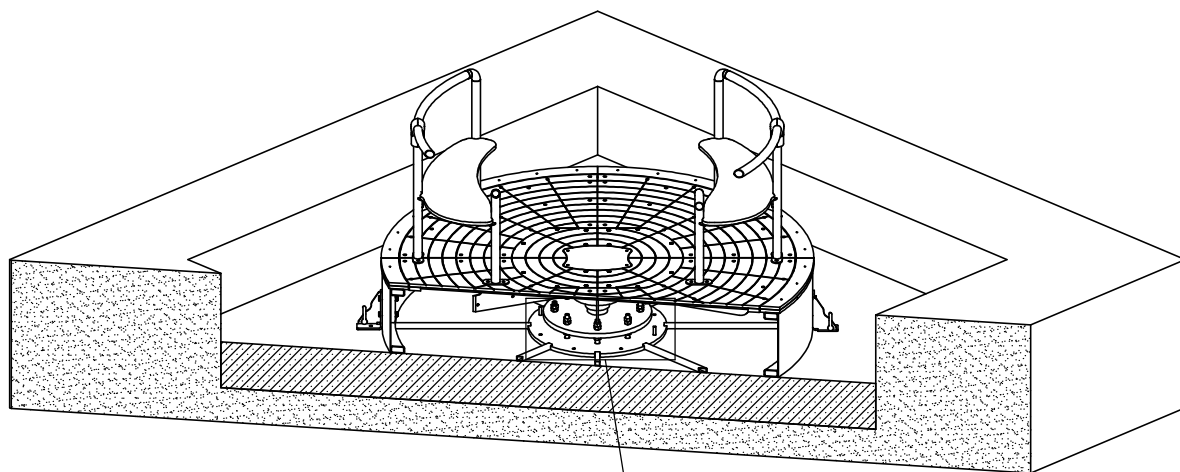


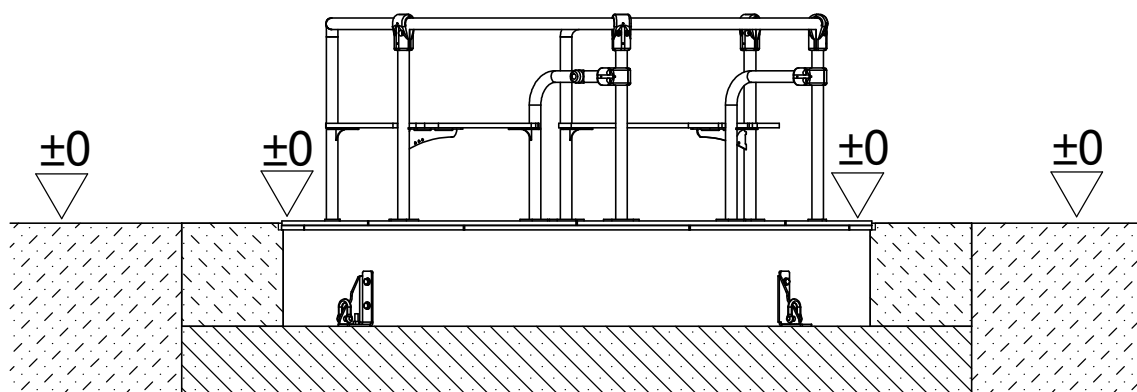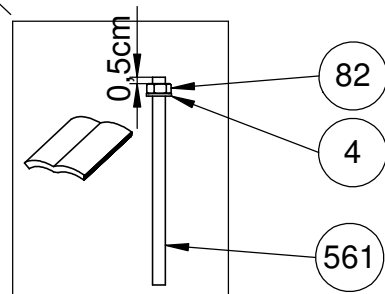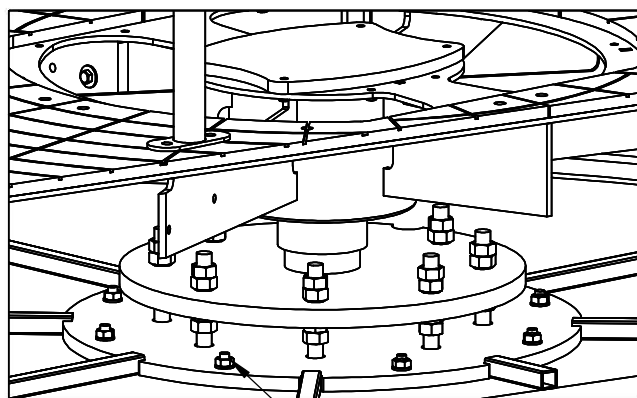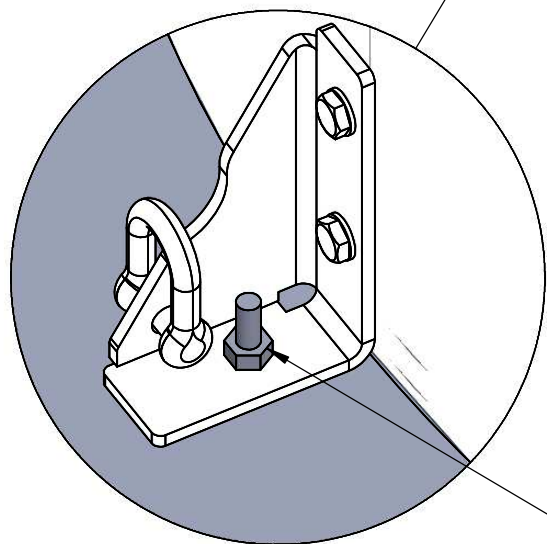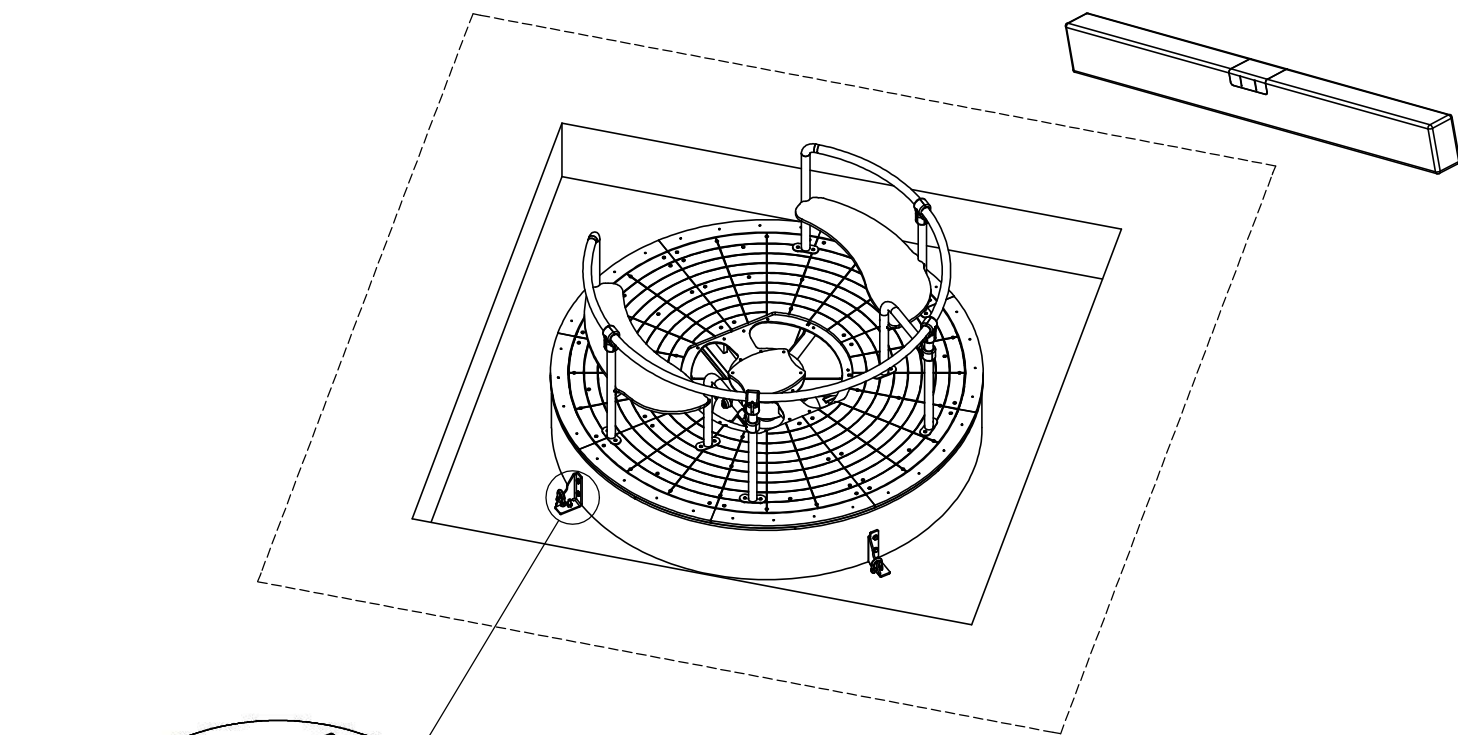

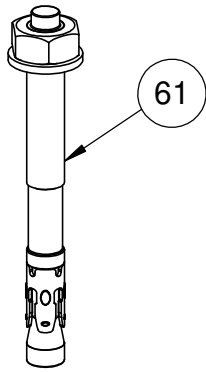


Nr	Element		
61		-	KL105


I

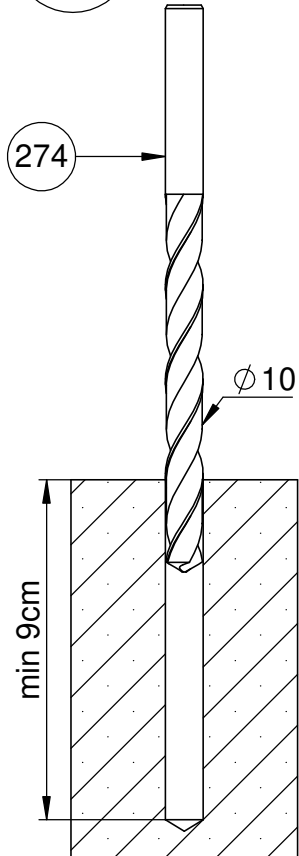


II

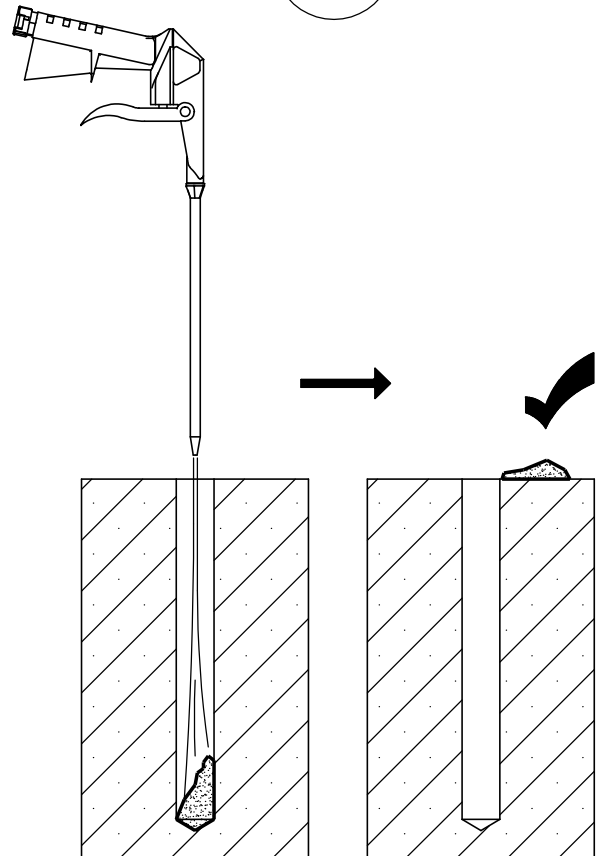


III

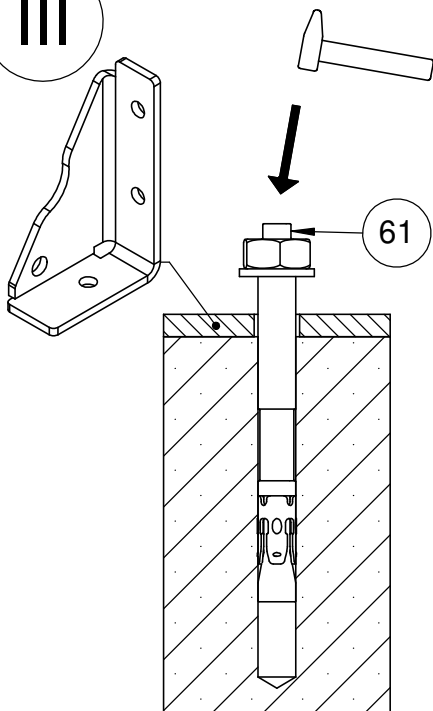


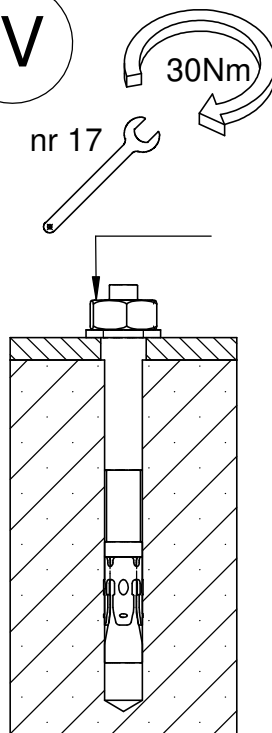



IV







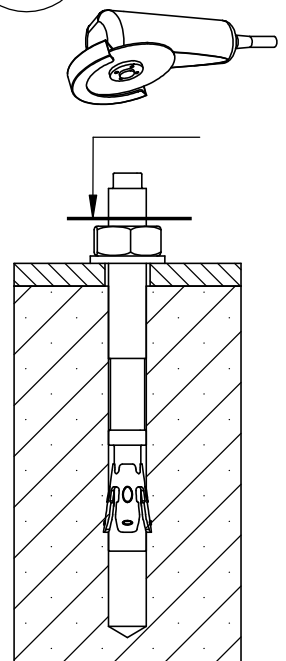


V

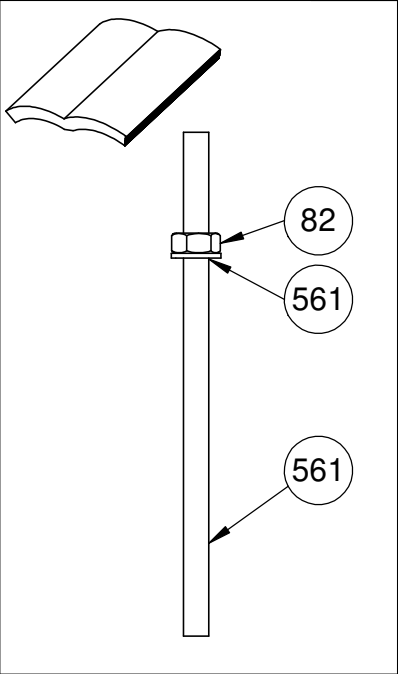





Nr	Element		
4		DIN 125	10x20 (OC)
82		DIN 934	M10 (OC)
526		-	KCH
561		-	S1_4000_60

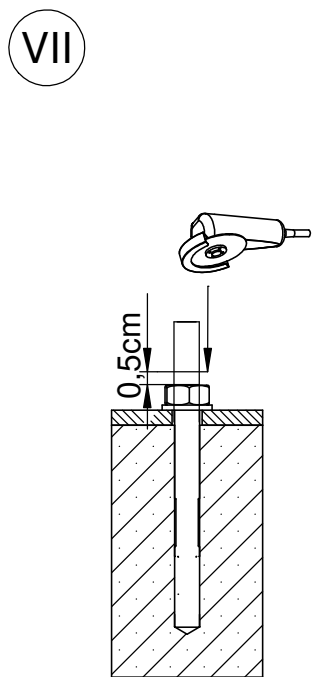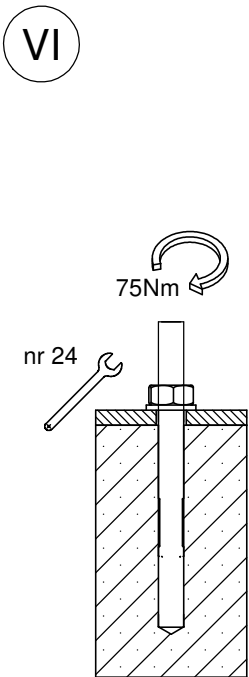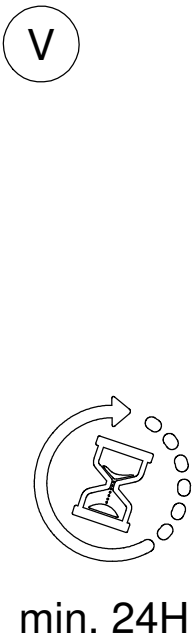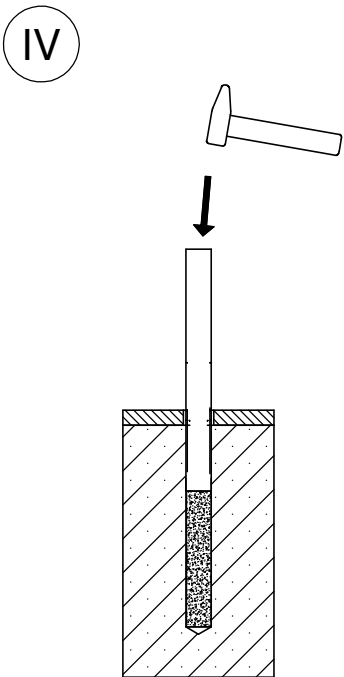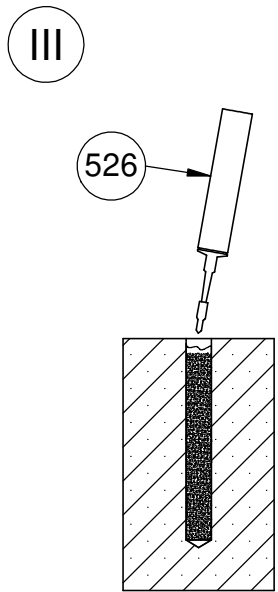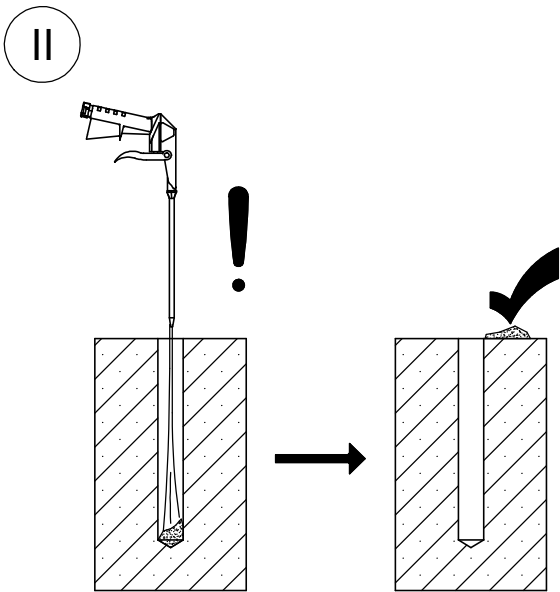
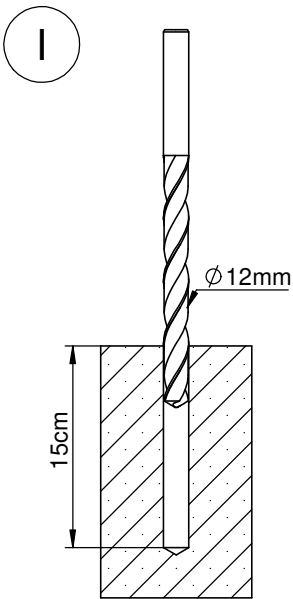


4

4079N

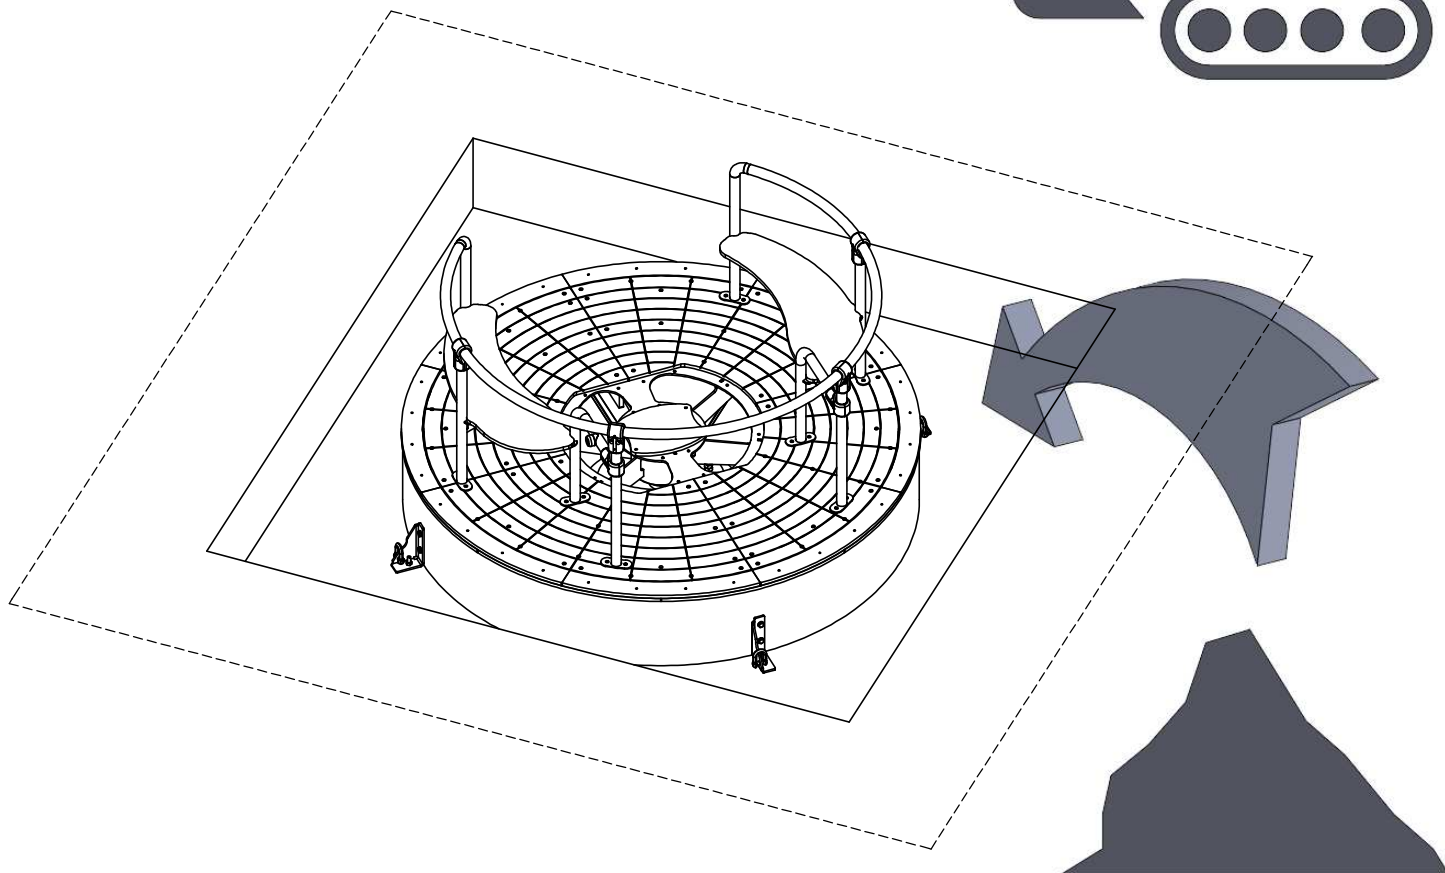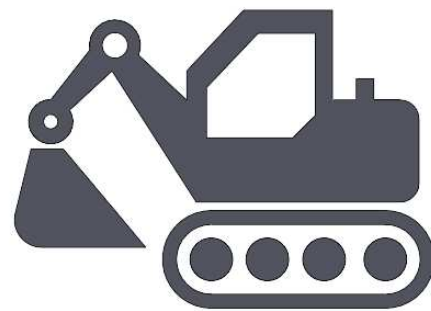

INST_Z 1

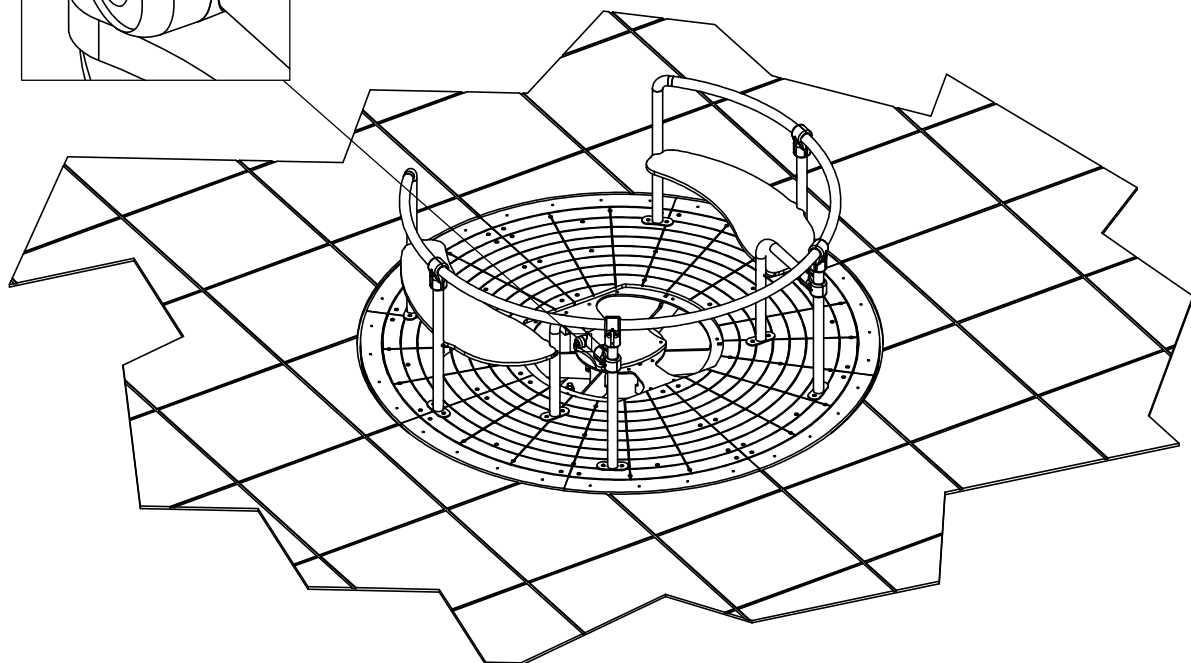

5

4079N

